

HAUDO®
www.haodatools.com

Drywall Sander
Cement Smoothing Machine
Paint Spraying Equipment
Electric Mixer
Drywall Sander Support Cart



New catalogue
Construction Power Tools
Drywall Sander
Brushless Angle Grinder
Electric Mixer
Scouring Machine



ZHEJIANG WUYI HAODA TOOLS MANUFACTURE CO.,LTD

Add: NO. 7, SHENBAO ROAD, NIUBEIJIN INDUSTRIAL AREA,
BAIYANG DISTRICT, WUYI, ZHEJIANG, CHINA

Tel: +86-579-87613390

Fax: +86-579-87705128

Mail: sales@wyhdttools.com

kenader2006@188.com



COMPANY PROFILE

Zhejiang Wuyi Haoda Tools Manufacture Co.,Ltd , built in 2006, located in WUYI , next to hardware city YONGKANG, with 35000m² building area, is a professional manufacturer of power tools, esp. building tools of drywall sander, electric mixer, paint sprayer, and scouring machine etc.


Haoda has an excellent team of research and development , and make innovation esp. in brush-less machine. Our design is strictly according to the European and American standard to meet different market demand. Have European certificate CE, GS, ROHS, PAHS, and US certificate UL.

Haoda has passed ISD9001:2000 Quality Management system, and obey 6S management mode, to ensure the high quality and good service.

To be “ Honest, Innovative, Realistic, Pragmatic” , and always carry out principle of “Customer first, Quality first & Service first”. Haoda has attained high reputation from many overseas markets.

Haoda offers a one-year warranty on all products. Our technical staff is at your service ,should there be any problem, they have a proven track record of resolving 99.9% of customers’ concern. Your order can be delivered to you in as few as 30days.

01-23	Long-arm drywall sander
24	Orbital sander
25-33	Portable drywall sander
34	Cement sander
35-42	Mixer
44-46	Scouring machine
48-50	Other machine
51-60	Paint equipment
61-62	Cordless tools

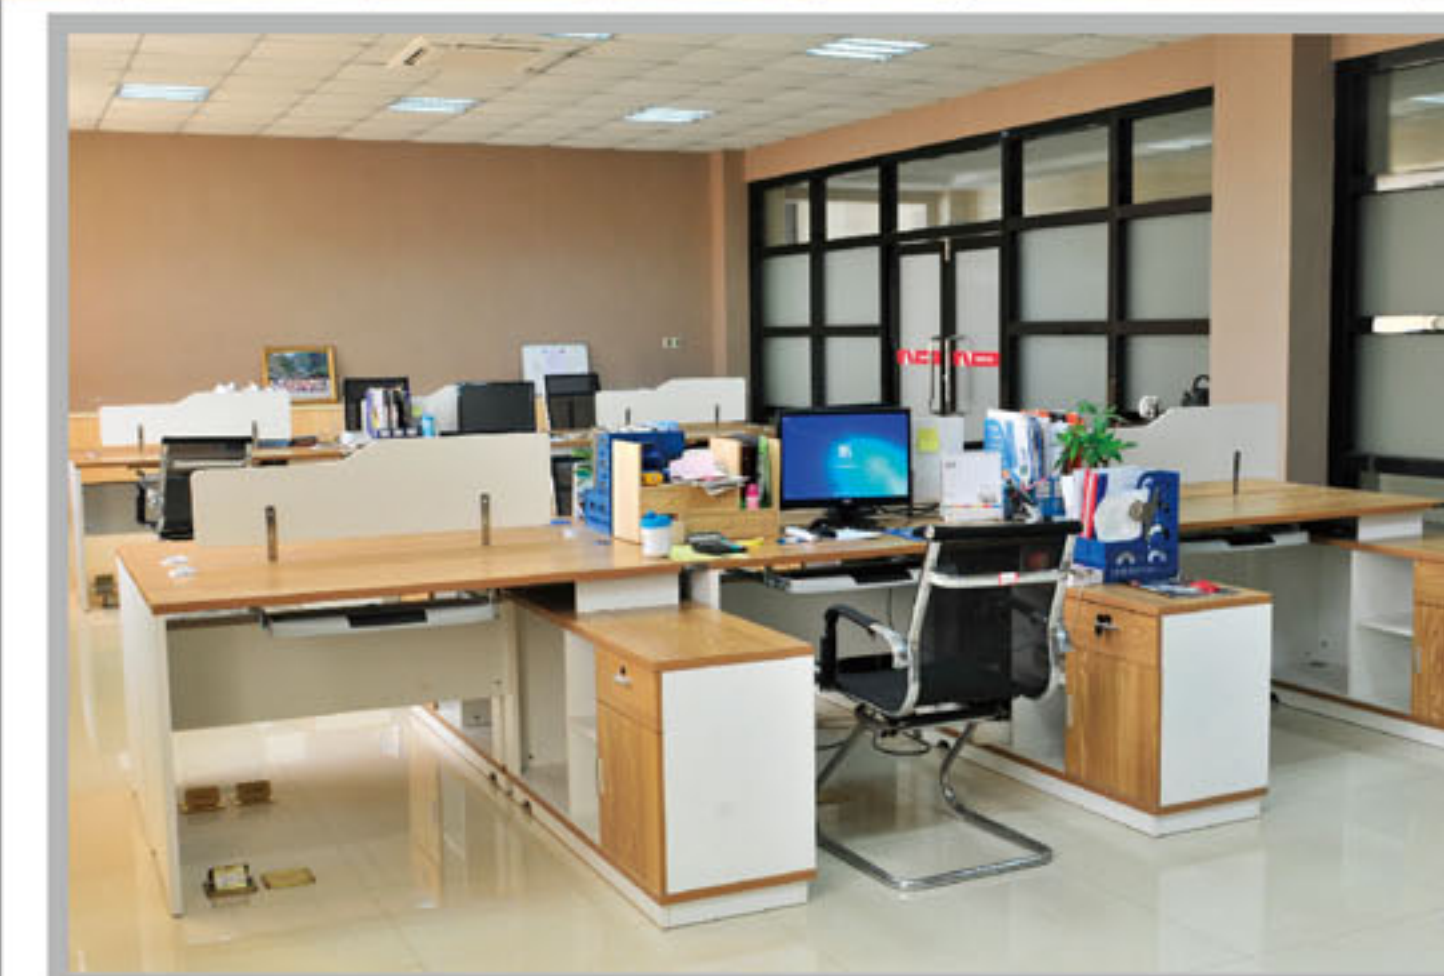

Zhejiang Wuyi Haoda Tools Manufacture Co.,Ltd ISO9001:2008 SYSTEM CERTIFICATION



ISO

ISO

CE



ROHS

EMC

GS

CE




UL

UL

CERTIFICATE

POWERFUL PROFESSIONAL TOOLS

Haoda Tools devotes to supply high quality construction tools for craftsman, and introduced advanced equipments to achieve that.

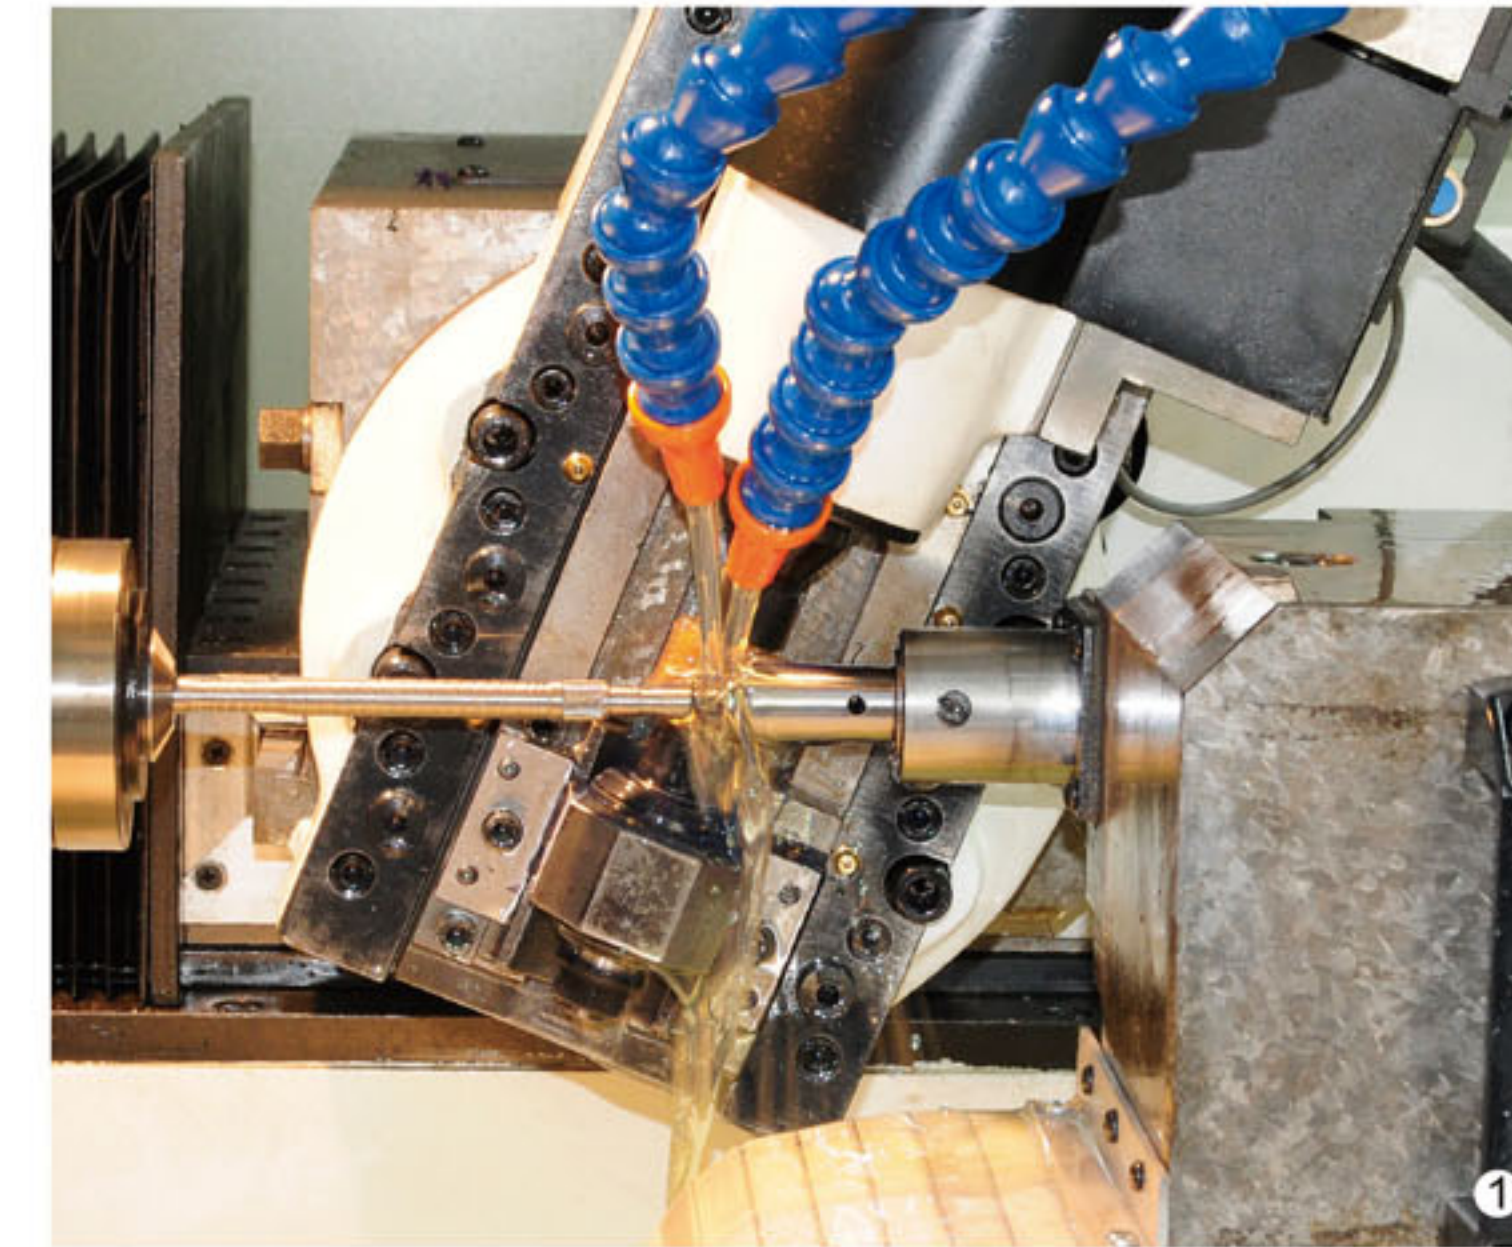

- | | |
|--|--|
| 1.Rotor slot machine | 5.Precision CNC lathe |
| 2.High-accuracy rotor balance machine | 6.Rotor varnish machine |
| 3.High-accuracy rotor shaft gear hobbing machine | 7.High-accuracy rotor shaft gear hobbing machine |
| 4.High precision rotor welding machine | 8.Production line |
| | 9.Production line |

POWERFUL PROFESSIONAL TOOLS

>> Drywall Sander

01

First develop Long-arm
auto-vacuum drywall sander

02

Optimized air system ensure
big vacuum power


03

Good sealing for anti-dust
well protection for motor

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit),Ø225mm
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 2 adapters
- 6 hoops
- 1 vacuum pipe
- 1 carrying bag (optional)

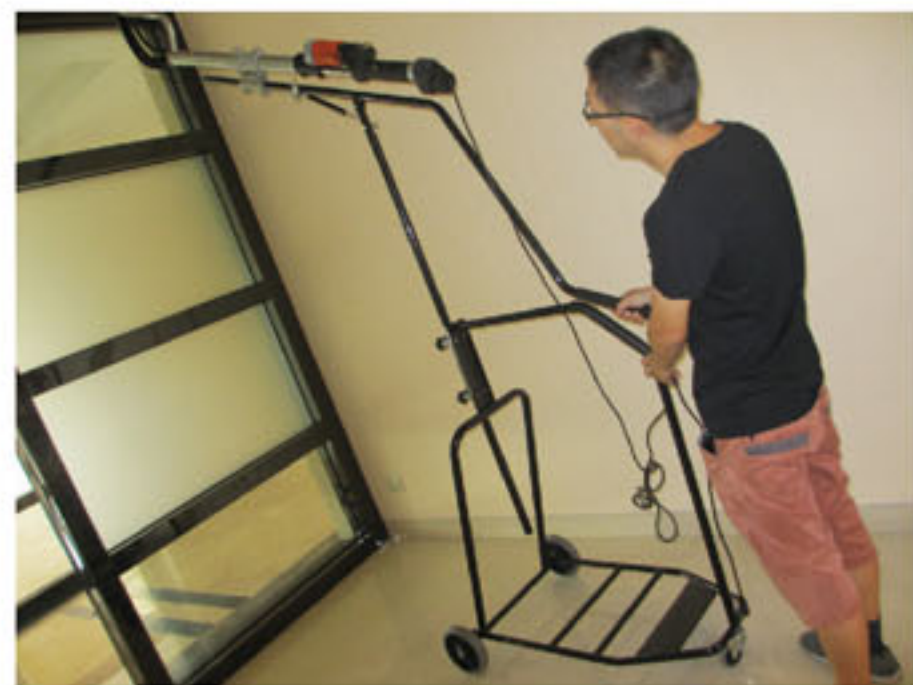

Drywall sander support cart

FEATURE

- * Drive shaft, more straight ,more durable use
- * Sanding pad: higher molecular, more ventilative, and enhance vacuum power
- * Light head, easy to operate
- * Unique adjustable aluminum set, help soft and steady sanding, more smooth
- * Soft cover of pipe: more comfortable to operate
- * Big handle: easier to operate when sanding top
- * Variable speed control
- * High speed, more efficient

SPECIFICATION:

CE ENEC EMC ROHS

Model								
DMJ-700A	220-240/110V 50/60HZ	710W	1000-2200/min	225mm	160cm	136x26x13cm 163X26X26cm	6.7KGS 4.3KGS	605/1250/1450PCS 248/500/580PCS



FEATURE

- * Drive shaft, more straight ,more durable use
- * Sanding pad: higher molecular, more ventilative, and enhance vacuum power
- * Light head, easy to operate
- * Unique adjustable aluminum set, help soft and steady sanding, more smooth
- * Soft cover of pipe: more comfortable to operate
- * Big handle: easier to operate when sanding top
- * Variable speed control
- * High speed, more efficient

SPECIFICATION:

UL LISTED CE ENEC EMC ROHS

Model								
DMJ-700A-1	220-240/110V 50/60HZ	710W	1000-2200/min	225mm	160cm	136x26x13cm 163X26X26cm	6.7KGS 4.3KGS	605/1250/1450PCS 248/500/580PCS
DMJ-700A-1L	220-240/110V 50/60HZ	710W	1000-2200/min	225mm	160cm	136x26x13cm 163X26X26cm	6.7KGS 4.3KGS	605/1250/1450PCS 248/500/580PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

FEATURE

- * Drive shaft, more straight ,more durable use
- * High speed, more efficient
- * Soft grip handle of pipe: more comfortable to operate
- * Big handle: easier to operate when sanding top
- * Unique adjustable aluminum set, help soft and steady sanding, more smooth
- * Sanding pad: higher molecular, more ventilative, and enhance vacuum power
- * Variable speed control
- * Light head, easy to operate
- * Big T-shape handle,hold on waist to reduce weight on hand



SPECIFICATION:

CE RoHS

Model							
DMJ-700A-2	220-240/110V 50/60HZ	710W	1000-2200/min	225mm	136x26x13cm 163x26x26cm	6.7KGS 4.3KGS	605/1250/1450PCS 248/500/580PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE



SPECIFICATION:

UL CE RoHS

Model								
DMJ-700B	220-240/110V 50/60HZ	710/750W	1000-2200/min	225mm	110-180cm	88x26x14.3cm 115X26X26cm	6.8KGS 4.4KGS	870/1800/2100PCS 405/846/930PCS
DMJ-700B-1	220-240/110V 50/60HZ	710W	1000-2200/min	225mm	110-180cm	88x26x14.3cm 115X26X26cm	6.8KGS 4.4KGS	870/1800/2100PCS 405/846/930PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 2 adapters
- 6 hoops
- 1 vacuum pipe
- 1 carrying bag (optional)



DMJ-700B-2

Speed adjuster:1000-2100/min
speed 3-4 suitable for soft
wall and fine sanding.Speed
4-5 suitable for hard wall
and efficient sanding.

Adjustable pipe enables easy
sanding of ceiling and ensure durable
ues of drive shaft.

FEATURE



- * Drive shaft, more straight ,more durable use
- * Sanding pad: higher molecular, more ventilative, and enhance vacuum power,moving much more steady
- * Light head, easy to operate
- * Motor separated from pipe, avoid dust enter motor
- * Easier change of external carbon brush
- * Big handle: easier to operate when sanding top
- * Variable speed control
- * max speed to be 2100/min, more efficient
- * The plastic cover of the head: Much stronger, it is not broken even fall off from height
- * 0-90 degree rotating of support arm, no need to change operating way

SPECIFICATION:

CE RoHS EMC

Model								
DMJ-700B-2	220-240/110V 50/60HZ	710W	1000-2100/min	225mm	130-180cm	88x26x14.3cm	6.8KGS 4.4KGS	870/1800/2100PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE



SHORT VERSION
With length of 110cm for convenient
working in awkward area.



LONGER VERSION
Arriving longest length of 180cm with extended handle
for sanding the ceilings easily and power-saving.

Motor assembled on the
head with good sealing
ensure durable use



DMJ-700C

Adjustable activities block
ensures sanding head turn
0-120 degree,easy to sand
ceiling.

FEATURE

- * MORE DURABLE USING
- * Length 110-170cm With extension bar
- * 750W motor Powerful with max speed to be 2100/min, more efficient
- * Sanding pad:higher molecular, more ventilative, and enhance vacuum power , moving much more steady, compared to other sanders's shaking
- * Bearing and motor: Good sealing, Good structure----Less dust enter motor good protection of motor
- * Sanding head flexible with range 0-120 degree, easy for ceiling sanding
- * Big handle for operation

SPECIFICATION:

CE RoHS EMC

Model								
DMJ-700C	220-240/110V 50/60HZ	710W 750W	1000-2100/min	225mm	110-180cm	96x32x16cm 115X26X26cm	6.8KGS 4.4KGS	550/1100/1350PCS 405/846/930PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 2 adapters
- 6 hoops
- 1 vacuum pipe
- 1 carrying bag (optional)



SPECIFICATION:								
CE RoHS EMC								
Model								
DMJ-700C-L	220-240/110V 50/60HZ	710W 750W	1000-2100/min	225mm	110-180cm	96x32x16cm 115X26X26cm	6.8KGS 4.4KGS	550/1100/1350PCS 405/846/930PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE



SPECIFICATION:								
CE RoHS EMC								
Model								
DMJ-700C-1	220-240/110V 50/60HZ	710W 750W	1000-2100/min	225mm	160cm	136x26x13cm 163x26x26cm	6.8KGS 4.4KGS	465/852/1080PCS
DMJ-700C-2	220-240/110V 50/60HZ	710W 750W	1000-2100/min	225mm	110-180cm	100x26x26cm	6.8KGS 4.4KGS	465/852/1080PCS

LONG REACH DRYWALL SANDER
WITH AUTOMATIC VACUUM SYSTEM

FEATURE

- * Motor assembled on sander's head with good sealing ensure durable use, and good balance for motor
- * Auto-vacuum system, dustless,no need vacuum cleaner
- * Sanding pad: moving much more steady
- * Sanding head can adjust in big degree 0-120
- * With big support handle,extend bar, telescopic
- * Variable speed

PATENTED



Detachable plastic cover enables sanding edge of wall



DMJ-700C-3

Automatic vacuum system enables dust absorption



Dust absorption system inside, no vacuum cleaner needed.

SPECIFICATION:

CE ROHS

Model	Plug	Motor	Speed	Disc	Handle	Box	Weight	Capacity
DMJ-700C-3	220-240/110V 50/60HZ	710W 750W	1000-1850/min	225mm	110-180cm	101X32X21.5cm	6.9KGS 4.5KGS	390/800/950PCS

LONG REACH DRYWALL SANDER
WITH AUTOMATIC VACUUM SYSTEM

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 1 vacuum pipe
- 1 dust bag
- 1 Y-shape spanner

PATENTED



Dust absorption system inside, no vacuum cleaner needed.

Speed adjuster:1000-1850/min, speed 3-4 suitable for soft wall and fine sanding.Speed 4-5 suitable for hard wall and efficient sanding.



DMJ-700C-5

Automatic vacuum system enables dust absorption

SPECIFICATION:

CE ROHS

Model	Plug	Motor	Speed	Disc	Handle	Box	Weight	Capacity
DMJ-700C-5	220-240/110V 50/60HZ	710W 750W	1000-1850/min	225mm	110-180cm	101x32x21.5cm	6.9KGS 4.5KGS	390/800/1950PCS

LONG REACH DRYWALL SANDER
WITH AUTOMATIC VACUUM SYSTEM

FEATURE

- * Auto-vacuum system, dustless,no need vacuum cleaner
- * Flexiable Sanding head, adjust in degree 0-120
- * Durable:Motor assembled on sander's head with good sealing ensure durable use, and good balance for motor
- * Sanding pad: moving more steady,
- * Big support handle
- * Variable speed
- * soft grip, comfortable for work
- * Length 110-180cm adjustable With extension bar

PATENTED



Improved automatic vacuum system enables powerful dust absorption and no need vacuum cleaner

DMJ-700C-6

The adjustable output shaft ensure easy sanding of uneven surface

SPECIFICATION:

CE ROHS

Model								
DMJ-700C-6	220-240/110V 50/60HZ	710W 750W	1000-1850min	225mm	110-180cm	101X32X21.5cm	6.9KGS 4.5KGS	390/800/950PCS

LONG REACH DRYWALL SANDER
WITH AUTOMATIC VACUUM SYSTEM

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 1 vacuum pipe
- 1 dust bag

PATENTED



Dust absorption system inside, no vacuum cleaner needed.

Foldable,save space

DMJ-700C-6F

Improved automatic vacuum system enables powerful dust absorption and no need vacuum cleaner

SPECIFICATION:

CE ROHS

Model								
DMJ-700C-6F	220-240/110V 50/60HZ	710W 750W	1000-1850min	225mm	110-180cm	73.5x30.5x2.5cm	6.9KGS 4.5KGS	520/1090/1270PCS

LONG REACH DRYWALL SANDER

FEATURE

- * Flexible sanding head, adjust in degree 0-120
- * Durable:Motor assembled on sander's head with good sealing ensure durable use, and good balance for motor
- * Sanding pad: moving more steady,
- * Big support handle
- * Variable speed
- * soft grip, comfortable for work
- * Length 110-180cm adjustable with extension bar

PATENTED



SPECIFICATION:

CE ROHS

Model								
DMJ-700C-8	220-240/110V 50/60HZ	710W 750W	1000-2100min	225mm	110-180cm	101x32x21.5cm	6.8KGS 4.1KGS	390/800/950PCS

LONG REACH DRYWALL SANDER

FEATURE

- * Flexible Sanding head, adjust in degree 0-120
- * Durable:Motor assembled on sander's head with good sealing ensure durable use, and good balance for motor
- * Sanding pad: moving more steady,
- * Big support handle
- * Variable speed
- * soft grip, comfortable for work
- * Length 110-180cm adjustable with extension bar



DMJ-700C-8F	Foldable
DMJ-700C-8FT	Foldable+LED strip

SPECIFICATION:

CE ROHS

Model								
DMJ-700C-8L	220-240/110V 50/60HZ	710W 750W	1000-2100min	225mm	110-180cm	101x32x21.5cm	6.8KGS 4.1KGS	390/800/950PCS
DMJ-700C-8F	220-240/110V 50/60HZ	710W 750W	1000-2100min	225mm	135-180cm	74x32x22cm	6.8KGS 4.1KGS	490/1000/1200pcs
DMJ-700C-8FT	220-240/110V 50/60HZ	710W 750W	1000-2100min	225mm	135-180cm	74x32x22cm	6.8KGS 4.1KGS	490/1000/1200pcs

DRYWALL SANDER WITH DUAL PADS

FEATURE

- * MORE DURABLE USING
- * Length 110-180cm With extension bar
- * 750W motor powerful with max speed to be 2100/min, more efficient
- * Sanding pad: higher molecular, more entilative, and enhance vacuum power moving much more steady, compared to other sanders's shaking
- * Bearing and motor: Good sealing, Good structure----Less dust enter motor good protection of motor
- * Sanding head flexible with range 0-120 degree, easy for ceiling sanding
- * Big handle for operation



DYS-700C

PATENTED

Motor assembled on the head with good sealing ensure durable use

Rapid assembly, easy to change sanding heads



Turn 360° of triangle pad

SPECIFICATION:

CE RoHS EMC

Model	Power	Motor	Speed	Pad Size	Length	Box Size	Weight	Capacity
DYS-700C	220-240/110V 50/60HZ	710W 750W	1000-2100min	225mm	110-180cm	101X32X21.5cm	7.5KGS 5KGS	390/800/950PCS
DYS-700CF	220-240/110V 50/60HZ	710W 750W	1000-2100min	225mm	135-180cm	74x32x22cm	7.5KGS 5KGS	490/1000/1200pcs

AUTO VACCUMM DRYWALL SANDER WITH DUAL PADS

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 1 vacuum pipe
- 1 dust bag
- 1 Y-shape spanner

PATENTED



DYS-700C-3

Motor assembled on the head with good sealing ensure durable use

Rapid assembly, easy to change sanding heads



SPECIFICATION:

CE RoHS EMC

Model	Power	Motor	Speed	Pad Size	Length	Box Size	Weight	Capacity
DYS-700C-3	220-240/110V 50/60HZ	710W 750W	1000-1850min	225mm	110-180cm	101x32x21.5cm	7.5KGS 5KGS	390/800/950PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

FEATURE

- * Brushless motor, working over 2000 hours
- * Soft start and costant speed control
- * Light: only 3.7kgs
- * Efficient :1010W motor Powerful
- * Detachable foam pad: durable foam,change foam only after use
- * Adjustable LED, strong light to check flatness
- * Bearing and motor: Good sealing, Good structure----Less dust enter motor ,good protection of motor
- * Sanding head flexible with range 0-120 degree, easy for ceiling sanding
- * Length 110-180cm With extension bar checking the smooth of sanding wall.
- * Soft grip, comfortable for work
- * Big handle for operation

BRUSHLESS



SPECIFICATION:

CE ENEC EMC ROHS

Model	Power	Motor	Speed	Disc Size	Length	Box Size	Weight	Capacity
BDS-1010A	220-240/110V 50/60HZ	1010W	1300-2000min	225mm	110-180cm	101X32X21.5cm	6.8KGS 4.1KGS	390/800/950PCS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

ACCESSORY







- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 inner hex spanner
- 1 two-dual screw driver
- 2 adapters
- 6 hoops
- 1 vacuum pipe

BRUSHLESS



SPECIFICATION:

CE ENEC EMC ROHS

Model							
BDS-1010B	220-240/110V 50/60HZ	1010W	1300-2000/min	225mm	136x26x13cm 163x26x26cm	6.8KGS 4.1KGS	605/1250/1450PC

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 inner hex spanner
- 1 two-dual screw driver
- 2 adapters
- 6 hoops
- 1 vacuum pipe

MOTOR:Above 5 times lifetime than usual
LIGHT WEIGHT:4.2kgs only,easy for work.
 Constant speed control



Dust absorption system inside,
 no vacuum cleaner needed .

BRUSHLESS



SPECIFICATION:

CE RoHS EMC

Model	Power	Speed	Size	Weight	Dimensions	Capacity	Volume
BDS-1010C	220-240/110V 50/60HZ	1010W	1300-2000min	225mm	110-180cm	101X32X21.5cm	6KGS 3.7KGS

LIGHT WEIGHT,SIMPLE DESIGN,EASY TO OPERATE

FEATURE

- * Brushless motor, working over 2000 hours
- * Soft start
- * Light: only 3.7kgs
- * Efficient :1010W motor powerful
- * Adjustable LED,strong light to check flatness
- * Bearing and motor: Good sealing, Good structure----Less dust enter motor ,good protection of motor
- * Sanding head flexible with range 0-120 degree easy for ceiling sanding
- * Length 110-180cm With extension bar checking the smooth of sanding wall.
- * Soft grip, comfortable for work
- * Big handle for operation

BRUSHLESS



SPECIFICATION:

CE RoHS EMC

Model	Power	Speed	Size	Weight	Dimensions	Capacity	Volume
DYS-1010A	220-240/110V 50/60HZ	1010W	1300-2000min	225mm	110-180cm	101x32x21.5cm	7.5KGS 5KGS

LONG REACH DRYWALL SANDER WITH AUTOMATIC VACUUM SYSTEM

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit),225mm
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 2 adapters
- 6 hoops
- 1 vacuum pipe
- 1 carrying bag (optional)

NEW



FEATURE

- * Drive shaft, more straight ,more durable use
- * Sanding pad: higher molecular, more ventilative, and enhance vacuum power
- * Light head, easy to operate
- * Unique adjustable aluminum set, help soft and steady sanding, more smooth
- * Soft cover of pipe: more comfortable to operate
- * Big handle: easier to operate when sanding top
- * Variable speed control
- * High speed, more efficient

SPECIFICATION:

CE RoHS EMC

Model	Power	Motor	Speed	Disc	Length	Box	Weight	Capacity
DMJ-700A-1GT	220-240/110V 50/60HZ	710W	1000-2200/min	225mm	160cm	136x26x13cm 163X26X26cm	6.7KGS 4.3KGS	605/1250/1450PCS 248/500/580PCS

LONG REACH DRYWALL SANDER WITH AUTOMATIC VACUUM SYSTEM

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 6 hoops
- 1 vacuum pipe
- 1 dust bag

NEW



SPECIFICATION:

CE RoHS EMC

Model	Power	Motor	Speed	Disc	Length	Box	Weight	Capacity
DMJ-700C-6FT	220-240/110V 50/60HZ	710W 750W	1000-1850min	225mm	135-180cm	74x32x22cm	6.9KGS 4.5KGS	490/1000/1200PCS

LONG REACH DRYWALL SANDER
WITH AUTOMATIC VACUUM SYSTEM

FEATURE

- * Auto-vacuum system, suck dust without vacuum cleaner
- * Flexiable Sanding head, adjust in degree 0-120
- * Durable:Motor assembled on sander's head with good sealing ensure durable use, and good balance for motor
- * Sanding pad: moving more steady,
- * Big support handle
- * Variable speed
- * soft grip, comfortable for work
- * Length 110-180cm adjustable With extension bar

NEW



SPECIFICATION:

CE ENEC GS emc ROHS

Model								
DMJ-700C-9	220-240/110V 50/60HZ	710W 750W	1000-1850/min	225mm	110-180cm	101x32x31.5cm	6.8KGS 4.4KGS	390x800x950PCS
DMJ-700C-9L	220-240/110V 50/60HZ	710W 750W	1000-1850/min	225mm	110-180cm	101x32x31.5cm	6.8KGS 4.4KGS	390x800x950PCS
DMJ-700C-9F	220-240/110V 50/60HZ	710W 750W	1000-1850/min	225mm	135-180cm	74x32x22cm	6.8KGS 4.4KGS	490/1000/1200PCS
DMJ-700C-9FT	220-240/110V 50/60HZ	710W 750W	1000-1850/min	225mm	135-180cm	74x32x22cm	6.8KGS 4.4KGS	490/1000/1200PCS

LIGHT WEIGHT,BUT POWERFUL

FEATURE

The random orbital sander developed for effective and dust-free of all kind of surfaces.The smallest and most ergonomic sander is equipped with a brushless motor,which maintains constant speed even under heavy load. With the lowest vibration values and the unique symmetrical design guarantees that the tool can be used for long periods without fatigue.

BRUSHLESS



S1A-HD01-150

CE ENEC GS emc ROHS

Voltage	230-240V~50Hz	Rated Eccentricity: 5.0
Power	400W	Rated Eccentricity: 2.0
Speed	4000-10000rpm	
Diameter	150mm	

AUTO-VACUUM DRYWALL SANDER

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 1 vacuum pipe
- 1 dust bag



The adjustable output shaft ensure easy sanding of uneven surface



Speed-adjuster

PATENTED



DMJ-700D

Switch and speed controller sealing well on cable,more durable



DMJ-700D-B

SPECIFICATION:

CE RoHS

Model							
DMJ-700D	220-240/110V 50/60HZ	710W	1500-3200/min	180mm	33.5x29x27cm 1PC 68.5x30.5x28.5cm 2PCS	8KGS 5KGS	950/1940/2280PCS
DMJ-700D-B	220-240/110V 50/60HZ	710W	1500-3200/min	225mm	33.5x29x27cm 1PC 68.5x30.5x28.5cm 2PCS	8KGS 5KGS	950/1940/2280PCS

AUTO-VACUUM ●

AUTO-VACUUM DRYWALL SANDER

FEATURE

- * Separated dust absorption system, which protect motor from dust enter.Each bearing with sealing ring also avoid dust to enter.
- * Side handle for holding, comfortable to operate
- * Soft grip, comfortable to operate
- * Big dust bag with carrying belt, big space increase vacuum absorption power.



Side handle(Left or right both OK)



Anti-lock/Lock switch

PATENTED



DMJ-700D-1



DMJ-700D-3

SPECIFICATION:

CE RoHS

Model							
DMJ-700D-1	220-240/110V 50/60HZ	710W	1500-3200/min	180mm	33.5x29x27cm 1PC	4KGS 2.5KGS	950/1940/2280PCS
DMJ-700D-3	220-240/110V 50/60HZ	710W	1500-3200/min	180mm	33.5x29x27cm 1PC	4KGS 2.5KGS	950/1940/2280PCS

AUTO-VACUUM ●

AUTO-VACUUM DRYWALL SANDER

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 1 vacuum pipe
- 1 dust bag



Strong protection of motor enable durable use



Soft grip enables tireless working

PATENTED



DMJ-700D-2



DMJ-700D-2B

SPECIFICATION:

CE RoHS EMC

Model							
DMJ-700D-2	220-240/110V 50/60HZ	850W	1500-3050/min	180mm	33.5x29x27cm 1PC	8KGS 5KGS	950/1940/2280PCS
DMJ-700D-2B	220-240/110V 50/60HZ	850W	1500-3050/min	225mm	35x33x28cm 1PC	8KGS 5KGS	780/1520/1800PCS

AUTO-VACUUM

AUTO-VACUUM DRYWALL SANDER

FEATURE

- * Separated dust absorption system, with sealing ring, also avoid dust to enter.
- * Side handle for holding, comfortable to operate
- * Soft grip, comfortable to operate
- * Big dust bag with carrying belt, big space increase vacuum absorption power.
- * high quality LED light, checking the smooth of sanding wall.



LED,check wall flatness when sanding



Soft grip enables tireless working

PATENTED



DMJ-700D-5



DMJ-700D-6

SPECIFICATION:

CE RoHS EMC

Model							
DMJ-700D-5	220-240/110V 50/60HZ	1010W	1500-3200/min	225mm	35x33x28ccm 1PCS	4KGS 2.5KGS	780/1520/1800PCS
DMJ-700D-6L	220-240/110V 50/60HZ	710W	1500-3200/min	180mm	33.5x29x27ccm 1PCS	4KGS 2.5KGS	950/1940/2280PCS

AUTO-VACUUM

AUTO-VACUUM DRYWALL SANDER

FEATURE

- * Separated dust absorption system, which protect motor from dust enter.Each bearing with sealing ring, also avoid dust to enter.
- * Big dust bag with carrying belt, big space increase vacuum absorption power.
- * Side handle for holding, comfortable to operate
- * Soft grip, comfortable to operate
- * high quality 360° LED light .



SPECIFICATION:

CE RoHS EMC

Model							
DMJ-700D-8	220-240/110V 50/60HZ	850W	n:max2600/min	180mm	28x24x29.5cm	4KGS 2.5KGS	1350/2900/3400PCS
DMJ-700D-8B	220-240/110V 50/60HZ	850W	n:max2600/min	225mm	33.5x29x27 cm 1PC	4KGS 2.5KGS	740/1700/1900PCS

AUTO-VACUUM ●

MULTI DRYWALL SANDER

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 1 vacuum pipe
- 1 dust bag



PATENTED



SPECIFICATION:

CE RoHS EMC

Model							
DYS-700DZ-2	220-240/110V 50/60HZ	850W	1000-1850/min	225mm	35x28.5x32cm1PC	5KGS 3.2KGS	750/1520/1800PCS

AUTO-VACUUM ●

MULTI DRYWALL SANDER

ACCESSORY

- 6 Sanding Paper(80/100/120/150/180/240grit)
- 1 pair of carbon brush
- 1 inner hex spanner
- 1 two-dual screw driver
- 1 adapter
- 1 dust bag



Enable sanding close to edges

PATENTED



DYS-700FZ

Round pad for change



Dust absorption system inside, no vacuum cleaner needed.

FEATURE

- * Separated dust absorption system, which protect motor from dust enter.Each bearing with sealing ring, also avoid dust to enter.
- * Big handle for holding, comfortable to operate
- * Soft grip, comfortable to operate
- * Big dust bag with carrying belt, big space increase vacuum absorption power.
- * Aluminum set: ensure heating sinking to protect motor for durable use



Side cover could be taken off to work on corner

PATENTED



DMJ-700F

DMJ-700F-1



Dust absorption system inside, no vacuum cleaner needed.

SPECIFICATION:

CE ROHS

SPECIFICATION:

CE ROHS

Model	220-240/110V 50/60HZ	1010W	1000-1950/min 6000-11000/min	225mm 290mm	57.5x31.5x24cm	9KGS 6KGS	740/1536/1722PCS
DYS-700FZ	220-240/110V 50/60HZ	1010W	1000-1950/min 6000-11000/min	225mm 290mm	57.5x31.5x24cm	9KGS 6KGS	740/1536/1722PCS

AUTO-VACUUM ● BMC ○

Model	220-240/110V 50/60HZ	1010W 1200W	1000-2350/min	180mm	57.5x31.5x24cm	9KGS 6KGS	740/1536/1722PCS
DMJ-700F-1	220-240/110V 50/60HZ	1010W 1200W	1000-2350/min	180mm	57.5x31.5x24cm	9KGS 6KGS	740/1536/1722PCS
DMJ-700F	220-240/110V 50/60HZ	1010W 1200W	1000-1950/min	225mm	57.5x31.5x24cm	9KGS 6KGS	740/1536/1722PCS

Constant power control ○ AUTO-VACUUM ●

FEATURE

- * Separated dust absorption system, which protect motor from dust enter.
- * Big handle for holding, comfortable to operate
- * Soft grip, comfortable to operate
- * Big dust bag with carrying belt, big space increase vacuum absorption power.
- * Aluminum set: ensure heating sinking, to protect motor for durable use
- * high quality 360° LED light .

PATENTED



SPECIFICATION:

CE RoHS EMC


Model	Power	Motor	Speed	Disc Size	Dimensions	Weight	Capacity
DMJ-700F-L	220-240/110V 50/60HZ	1010W	1000-2350/min	225mm	57.5x31.5x24cm	6KGS 3.8KGS	740/1536/1722PCS

BMC O

CEMENT SMOOTHING MACHINE

APPLICATION

- * Wet plaster, cement smoothing machine
- * Plastic pad for rough smoothing
- * Sponge pad for finishing smoothing
- * Abrasive for outwall paint removing

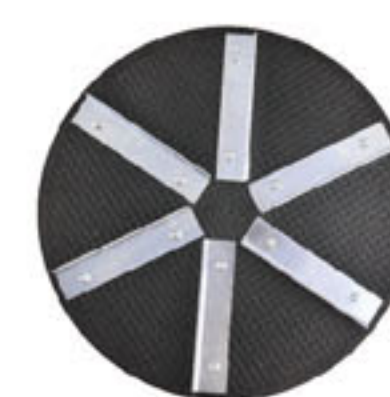

Scraping disc 370mm



Plastic disc 377mm



Sponge disc 390mm



Sanding disc 370mm

SPECIFICATION:

CE RoHS EMC

Model	Power	Motor	Speed	Disc Size	Dimensions	Weight	Capacity
DMJ-700F-5	220-240/110V 50/60HZ	710W	110/min	390mm	45x40x25cm	6KGS 4KGS	620/1200/1500PCS
DMJ-700F-5A	220-240/110V 50/60HZ	710W	60-200/min	390mm	45x40x25cm	6KGS 4KGS	620/1200/1500PCS

BMC O



»» *Cement/Paint mixer*

01

High torque for
cement/paint mixing

02


Ergonomic handle

03

Synchronization for mechanical
speed control



HAUDO®
www.haodatools.com

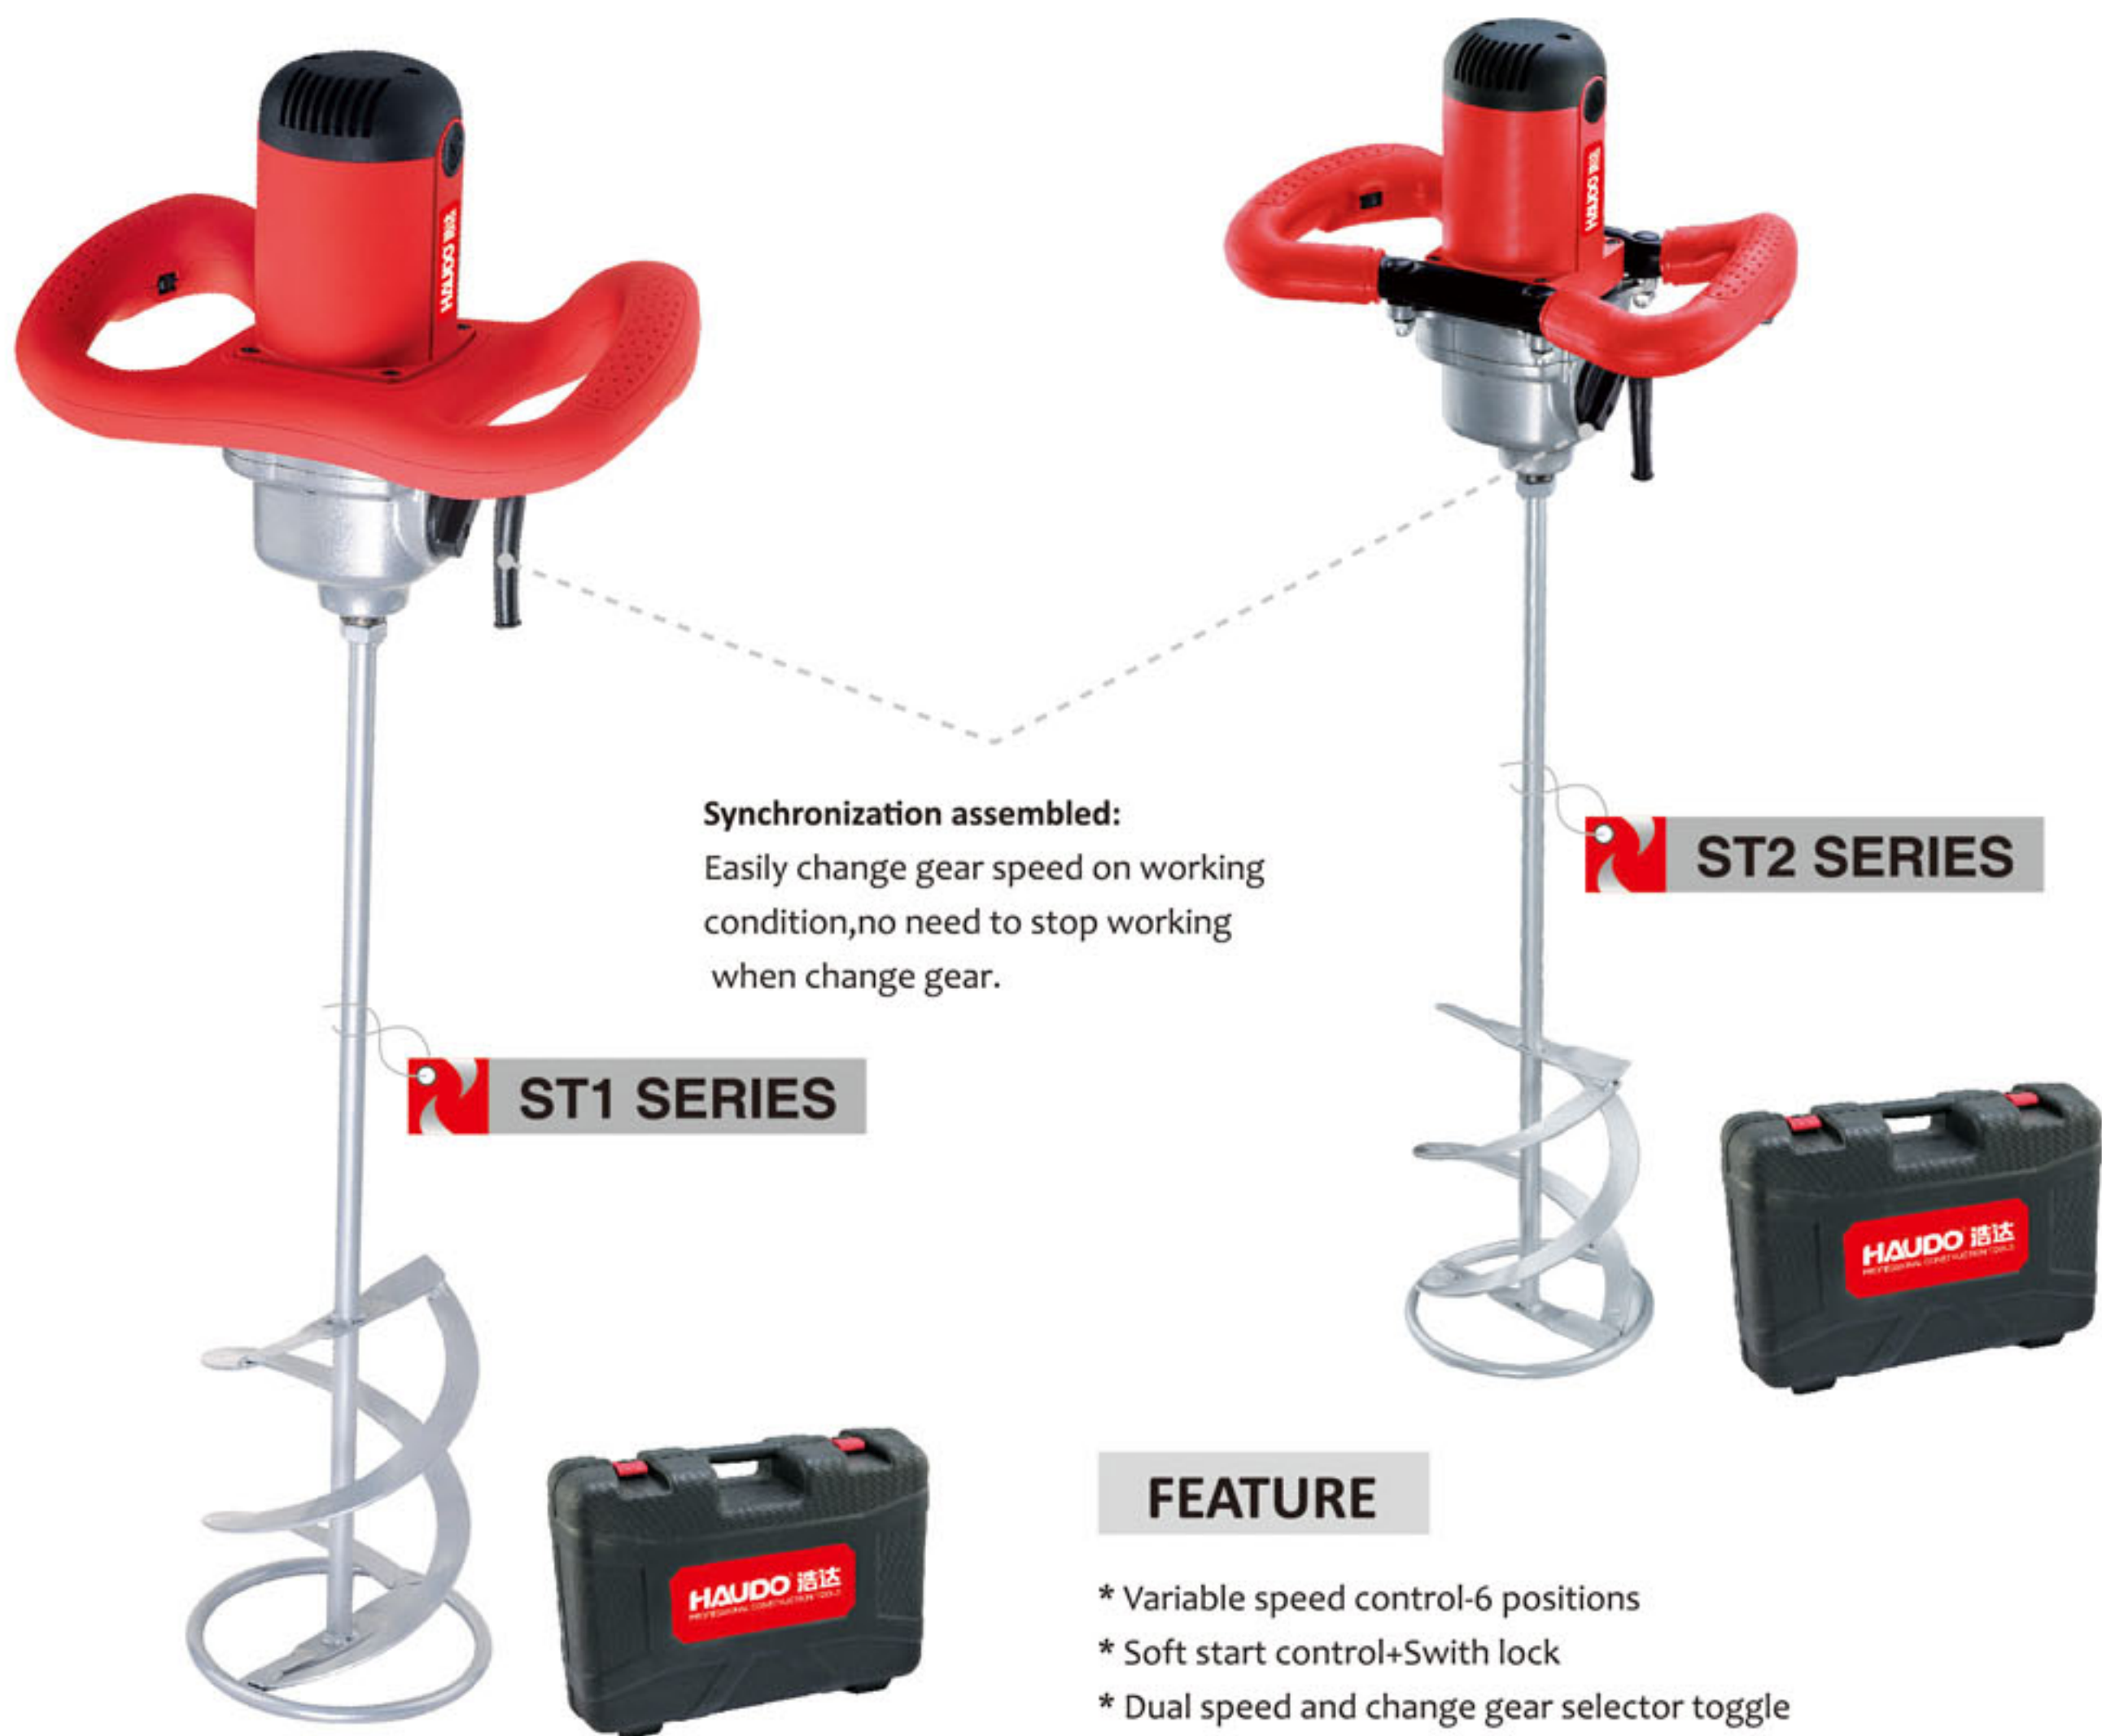

Synchronization assembled:
Easily change gear speed on working condition, no need to stop working when change gear.

ST2 SERIES

FEATURE

- * Variable speed control-6 positions
- * Soft start control+Switch lock
- * Dual speed and change gear selector toggle smoothly
- * Constant electronic controller and overload protection-optional
- * Ergonomic designed handle
- * Change carbon brush easily
- * Removing mixing paddle easily

SPECIFICATION:

CE RoHS EMC

Model							
ST1	220-240/110V 50/60HZ	1200W 1400W 1600W	I:180-380/min II:300-650/min	120/140/160 mm	63.5x31.5x44cm/2PCS 40x32.5x44cm/2PCS	15KGS 13.5KGS	680/1300/1530PCS
ST2	220-240/110V 50/60HZ	1200W 1400W 1600W	I:180-380/min II:300-650/min	120/140/160 mm	63.5x31.5x44cm/2PCS 40x32.5x44cm/2PCS	15KGS 13.5KGS	920/1906/2250PCS

Soft start ☐ Constant power control ☐ BMC ☐

ELECTRIC MIXER

ACCESSORY

- 1 pair of carbon brush
- 2 spanners



Synchronization assembled:
Easily change gear speed on working condition, no need to stop working when change gear.

ST3 SERIES

ST4 SERIES

FEATURE


- * Variable speed control-6 positions
- * Soft start control+Switch lock
- * Dual speed and change gear selector toggle smoothly
- * Constant electronic controller and overload protection-optional
- * Ergonomic designed handle
- * Change carbon brush easily
- * Removing mixing paddle easily

SPECIFICATION:

CE RoHS EMC

Model							
ST3	220-240/110V 50/60HZ	1010W 1200W 1400W 1600W	I:180-380/min II:300-650/min	120/140 mm	36.5x32.5X44cm/2PCS 63.5x31.5x44cm/2PCS	15KGS 13.5KGS	1060/2200/2580PCS 680/1300/1530PCS
ST4	220-240/110V 50/60HZ	1010W 1200W 1400W 1600W	I:180-380/min II:300-650/min	120/140 mm	36.5x32.5X44cm/2PCS 63.5x31.5x44cm/2PCS	15KGS 13.5KGS	1060/2200/ 2580PCS 680/1300/1530PCS

Soft start ☐ Constant power control ☐ BMC ☐

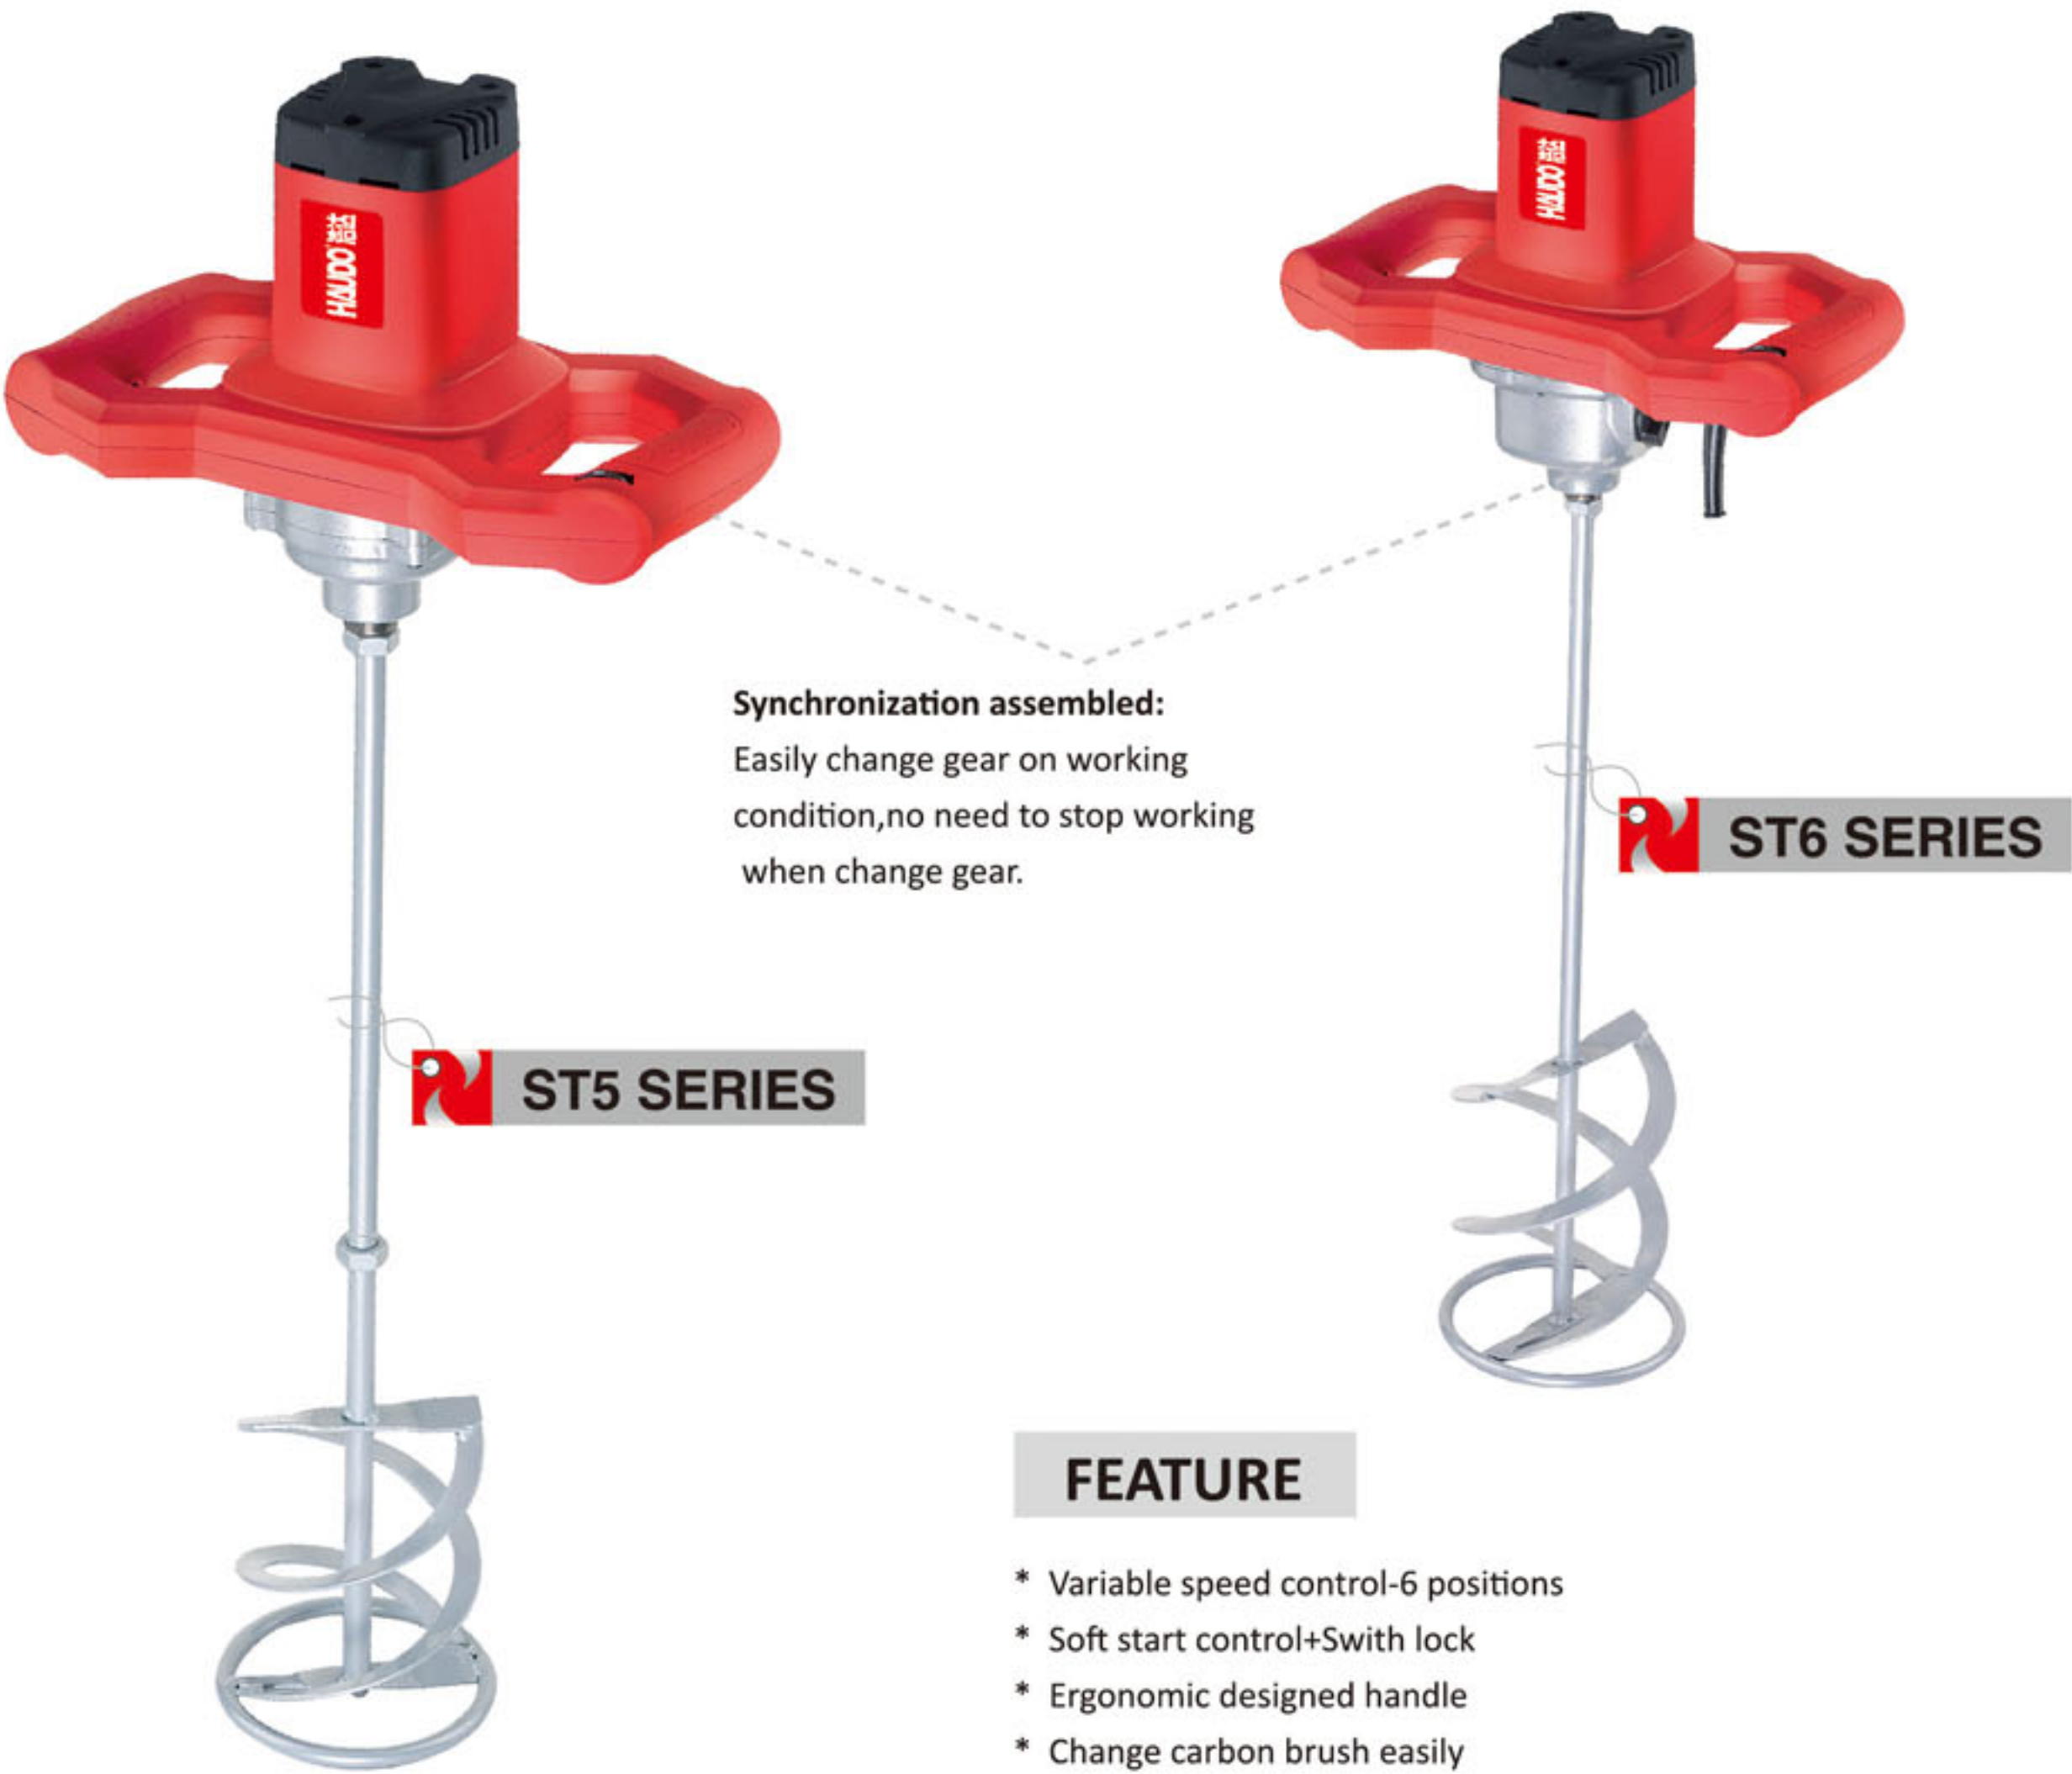

Synchronization assembled:
Easily change gear on working
condition,no need to stop working
when change gear.

ST6 SERIES

ST5 SERIES

FEATURE

- * Variable speed control-6 positions
- * Soft start control+Swith lock
- * Ergonomic designed handle
- * Change carbon brush easily
- * Removing mixing paddle easily
- * Dual speed and change gear selector
toggle smoothy

SPECIFICATION:

CE RoHS

Model							
ST5	220-240/110V 50/60HZ	1010W 1200W 1400W 1600W	180-700/min	120/140 mm	36.5x32.5X44cm/2PCS 63.5x31.5x44cm/2PCS	15KGS 13.5KGS	1060/2200/2580PCS 680/1300/1530PCS
ST6	220-240/110V 50/60HZ	1010W 1200W 1400W 1600W	I:180-400/min II:300-700/min	120/140 mm	36.5x32.5X44cm/2PCS 63.5x31.5x44cm/2PCS	15KGS 13.5KGS	1060/2200/2580PCS 680/1300/1530PCS

Soft start ☐ Constant power control ☐

ELECTRIC MIXER
ACCESSORY

- 1 pair of carbon brush
- 2 spanners



Synchronization assembled:
Easily change gear on working
condition,no need to stop working
when change gear.

ST9H SERIES

ST9 SERIES

FEATURE

- * Variable speed control-6 positions
- * Soft start control+Swith lock
- * Ergonomic designed handle
- * Change carbon brush easily
- * Removing mixing paddle easily
- * Dual speed and change gear selector
toggle smoothy

SPECIFICATION:

CE RoHS

Model							
ST9	220-240/110V 50/60HZ	1200W 1400W 1600W	I:240-500/min II:380-850/min	120/140 mm	63.5X32.5x44cm/2PCS 42.5x32.5X44cm/2PCS	15KGS 13.5KGS	660/1260/1480PCS 920/1900/2200PCS
ST9H	220-240/110V 50/60HZ	1200W 1400W 1600W	240-850/min	120/140 mm	63.5X32.5x44cm/2PCS 42.5x32.5X44cm/2PCS	15KGS 13.5KGS	660/1260/1480PCS 920/1900/2200PCS

Soft start ☐ Constant power control ☐



Synchronization assembled:
Easily change gear on working
condition, no need to stop working
when change gear.

ST8 SERIES

ST10 SERIES

1800W

FEATURE

- * Variable speed control-6 positions
- * Soft start control+Switch lock
- * Ergonomic designed handle
- * Change carbon brush easily
- * Removing mixing paddle easily
- * Dual speed and change gear selector
toggle smoothy

SPECIFICATION:

CE RoHS

Model								
ST8	220-240/110V 50/60HZ	1200W 1400W	I:180-400/min II:300-700/min	1PCS	120/140 mm	38.5x32x21cm/2PCS	6.5KGS 6KGS	920/1900/2250PCS
ST10	220-240/110V 50/60HZ	1200W 1400W 1600W 1800W	I:180-400/min II:300-700/min	1PCS	120/140 mm	63.5X31.5x44cm/2PCS	13.5KGS 12KGS	680/1300/1530PCS

Soft start ☐ Constant power control ☐

ELECTRIC MIXER

ACCESSORY

- 1 pair of carbon brush
- 2 spanners



ST11 SERIES

Synchronization assembled:
Easily change gear on working
condition, no need to stop working
when change gear.

FEATURE

- * Variable speed control-6 positions
- * Ergonomic designed handle
- * Change carbon brush easily
- * Removing mixing paddle easily

SPECIFICATION:

CE RoHS

Model								
ST11	220-240/110V 50/60HZ	1200W 1400W	I:180-400/min II:300-700/min	2PCS	120mm	38x29.5x34cm/1PC	6 KGS 4 KGS	1450/3020/3550PCS

Soft start ☐ Constant power control ☐

>> Scouring machine/Concrete grinder

01

Powerful

02

Efficient

03

Much clean environment-
connect with vacuum cleaner

SCOURING MACHINE / CONCRETE GRINDER



Carbide blade:Soft material removing



Diamond Cup:Hard material removing



XM-150



Efficient Carbide Blade Set/12sets



XM-120

SPECIFICATION:

UL US CE ROHS EMC ROHS

Model								
XM-150	220-240/110V 50/60HZ	1500W	2500-4500/min		140mm 125mm	83x29.5x23.5cm/2PCS 46.5x36x50cm/2PCS	21.20KGS/11KGS 13/11KGS	960/2000/2350PCS 650/1360/1610PCS
XM-120	220-240/110V 50/60HZ	1200W	9600/min		125mm	39.5x31x19	6.5KGS 4KGS	1200/2480/2900PCS

SOFT START ● BMC ○

SCOURING MACHINE / CONCRETE GRINDER

BRUSHLESS



Side cover could be taken off to work on corner



Strong diamond wheelcup ensure efficient work



Unique Bearing seat ensure head turn a bigger degree and durable use



XMB-1200



XM-1010

SPECIFICATION:

UL US CE ROHS EMC ROHS

Model								
XMB-1200	220-240/110V 50/60HZ	1200W	10500/min		125mm	43x19x14 cm	4KGS 2.5KGS	2400/5000/5900PCS
XM-1010	220-240/110V 50/60HZ	1010W	1700-3500/min		125mm	88x23x13 cm	7KGS 4.4KGS	870/1800/2100PCS

SOFT START ● BMC ○

BRUSHLESS ANGLE GRINDER

FEATURE

- * Big torque,the torsion reach to1.7Nm
- * Constant speed,more efficient
- * Motor life 3~5 times than normal one

Brushless motor
Motor life over 2000 hours



SPECIFICATION:

CE RoHS EMC

Model							
S1M-HD01	220-240/110V 50/60HZ	1010W	10500/min	110mm 115mm 125mm	39x15x13 cm	4KGS 2.5KGS	3600/7600/8900PCS
S1M-HD02	220-240/110V 50/60HZ	1010W	10500/min	110mm 115mm 125mm	37x14x11.5 cm	4KGS 2.5KGS	3600/7600/8900PCS

AUTO-VACUUM ● BMC ○

PLASTER MACHINE

FEATURE

- * Larger capacity boxes deliver increased productivity
- * Improved design for adjusting blade tension allows easy accurate setting for the perfect crown
- * Anodized aluminium plates for suprior durability
- * Pressure plate lid opens wide allowing easy access for cleaning
- * Pressure plate mounted on axle for smoother operation
- * Wheels run inside blade width
- * Springs allow easy and full opening of lid

PATENTED

PH-10



Roller design to make the work more smoothly,protect wall not to be hurt.




The degree between work surface and bar is adjustable and the degree could be locked.



Head pressure adjustable to meet different surface shapes and effects

SPECIFICATION:

Flat box size	250mm
Flat box handle	980mm-1600mm

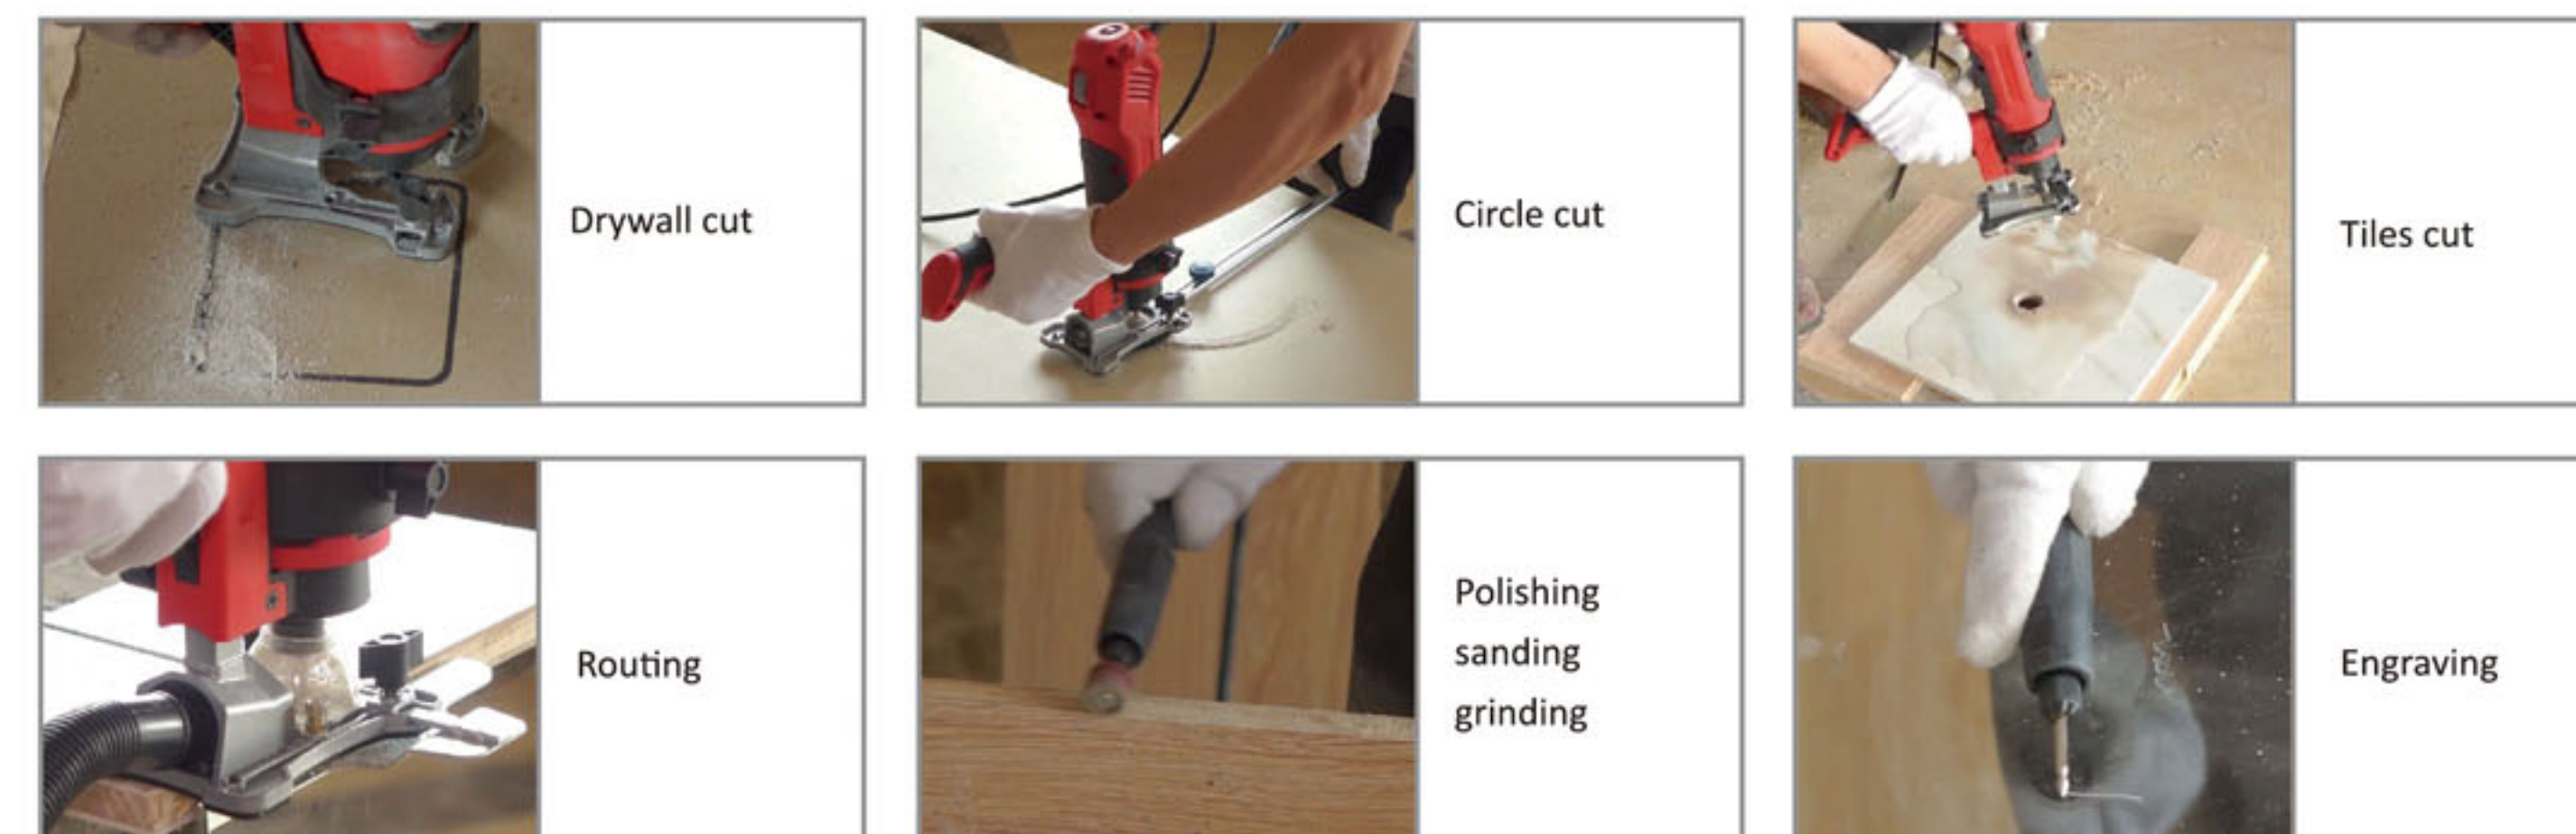

RENOVATION

● Powerful motor
550W motor able to
work through all materials

● Collet nut
changable to different
bits

● Variable speed adjuster
Suit to different working
condition

DMX-550A

● Depth adjuster
Vertical adjuster to
make suitable thickness



EXTEND BAR FOR MORE JOBS

SPECIFICATION:

Model			
DMX-550A	220-240/110V 50/60HZ	550W	5000-25500/min



UL LISTED CE ROHS



HD520

ACCESSORY

	1pc 50CM extension rod		1pc pressure gauge with De-pressurizing valve
	1pc high pressure pipe 13m		1 instruction manual
	1pc spraying gun		1pc each suction pipe, return pipe
	1pc 523 nozzle		1 pc each 17mm 19mm open-ended wrench

HIGH PRESSURE AIRLESS DIAPHRAGM PAINT SPAYER

- * Big flow
- * Good control of High pressure, only 20kg different
- * Thermal protection



HD525

Scope of application:

- * Home decoration water-based paint
- * Paint with solvent
- * Two-component coatings
- * Emulsion paint

Application area:

- * Home decoration spraying
- * Tooling basement: garage spraying
- * Color steel tile spraying
- * Casting release agent spraying
- * Outwall paint spraying
- * Radiator and steel member spraying

HD520

HD525

Voltage	230V~,50Hz	230V~,50Hz
Rated input of device	2.5 kw	3.0kw
Max.operating pressure	22.7Mpa 22.7bar	22.7Mpa 22.7bar
Max.volume flow	3.6/min	4.0l/min
Volume flow at 12Mpa with water	2.8l/min	3.3l/min
Max.viscosity	20000mPas	20000mPas
Net weight	42kg	42kg
Packing measurement	66cm*52cm*57cm	66cm*52cm*57cm





ACCESSORY

	1pc 50CM extension rod		1 instruction manual
	1pc high presuure pipe 13m		1pc each suction pipe, return pipe
	1pc spraying gun		1 pc each 17mm 19mm open-ended wrench
	1pc 523 nozzle		

HIGH PRESSURE AIRLESS PAINT SPRAYER

- * Brushless motor--High torque,more dura use
- * Electronic regulator-- More accurate



	HD6490	HD6495	HD6595
Maximum Tip Size	0.023	0.025	0.027
Maximum psi(bar)	3300(227)	3300(227)	3300(227)
Maximum lpm(gpm)	2.0(0.54)	2.3(0.60)	2.6(0.70)
Motor hp	1.0 Brushless DC	1.2Brushless DC	1.6Brushless DC
Net Weight kg(lb)	15(43)Stand	15(34)Stand	33(72)Stand

HD6390

CE ROHS

Maximum Tip Size	0.021
Maximum psi(bar)	3300(277)
Maximum lpm(gpm)	2.0(0.54)
Motor hp	5/8DC
Net Weight kg(lb)	14(30)stand

HIGH PRESSURE AIRLESS PAINT SPRAYER

FEATURE

- * Electroic Intellgent contral system
- * Good control of Pressure



ACCESSORY

	1pc 50CM extension rod		1pc pressure gauge with De-pressurizing valve
	1pc high presuure pipe 13m		1 instruction manual
	1pc spraying gun		1pc each suction pipe, return pipe
	1pc 523 nozzle		1 pc each 17mm 19mm open-ended wrench

HD61095

CE ROHS

Power	3000W	Max spraying pressure	3300psi
Voltage	220-240V~	Spray hose	15m
Frequency	50Hz	Weight	120lbs
Nozzle size	535		

FEATURE

- * Big flow
- * Electronic intelligent control system
- * Quick disassemble pump
- * Material piped to be 50m vertical height



HIGH PRESSURE AIRLESS PAINT SPRAYER

Scope of use: water-based paint, latex paint, paint
Applicable occasions: wall, steel, engineering

FEATURE

- * Long life time of carbon brush 2 years
- * Accurate mechanical pressure control similar result as brushless one
- * Little pressure change 2-3MPa different



HD450

ACCESSORY

	1pc 50CM extension rod		1pc pressure gauge with De-pressurizing valve
	1pc high pressure pipe 13m		1 instruction manual
	1pc spraying gun		1pc each suction pipe, return pipe
	1pc 523 nozzle		1 pc each 17mm 19mm open-ended wrench



HD440

	HD440	HD450
Type	Piston Pump	Piston Pump
Power	1000W	1300W
Voltage	220-240V~	220-240V~
Frequency	50Hz	50Hz
Nozzle size	519	521
Max spraying pressure	227bar(22.7MPa)	227bar(22.7MPa)
Flow	2.0L/min	2.4L/min
Spray hose	50MPa	50MPa
Weight	18Kg	22Kg

HD730

CE ENEC GS emc ROHS

Model	HD730	Delivery pressure	30Bar
Motor power	1500W	Delivery distance	30M
Voltage	220V/50HZ	Delivery height	15M
Max.aggregate diamatar	3MM	Net weight	55KGS

APPLICATION

- * Lacquer
- * Anti-crack motor
- * Water proofing materials
- * Refractories
- * Putty
- * Decorative mortar




ACCESSORY

	1pc 5CM spraying pipe		5pcs clean balls
	1pc spraying gun		2 tools to disassemble machines
	3pcs nozzle		
	1 instruction manual		

ELECTRIC PAINT ROLLER

- * Extend handle: 45cm
- * Input hose: 1m
- * Output hose: 3.8m
- Remote control switch+ speed adjuster (9 step)

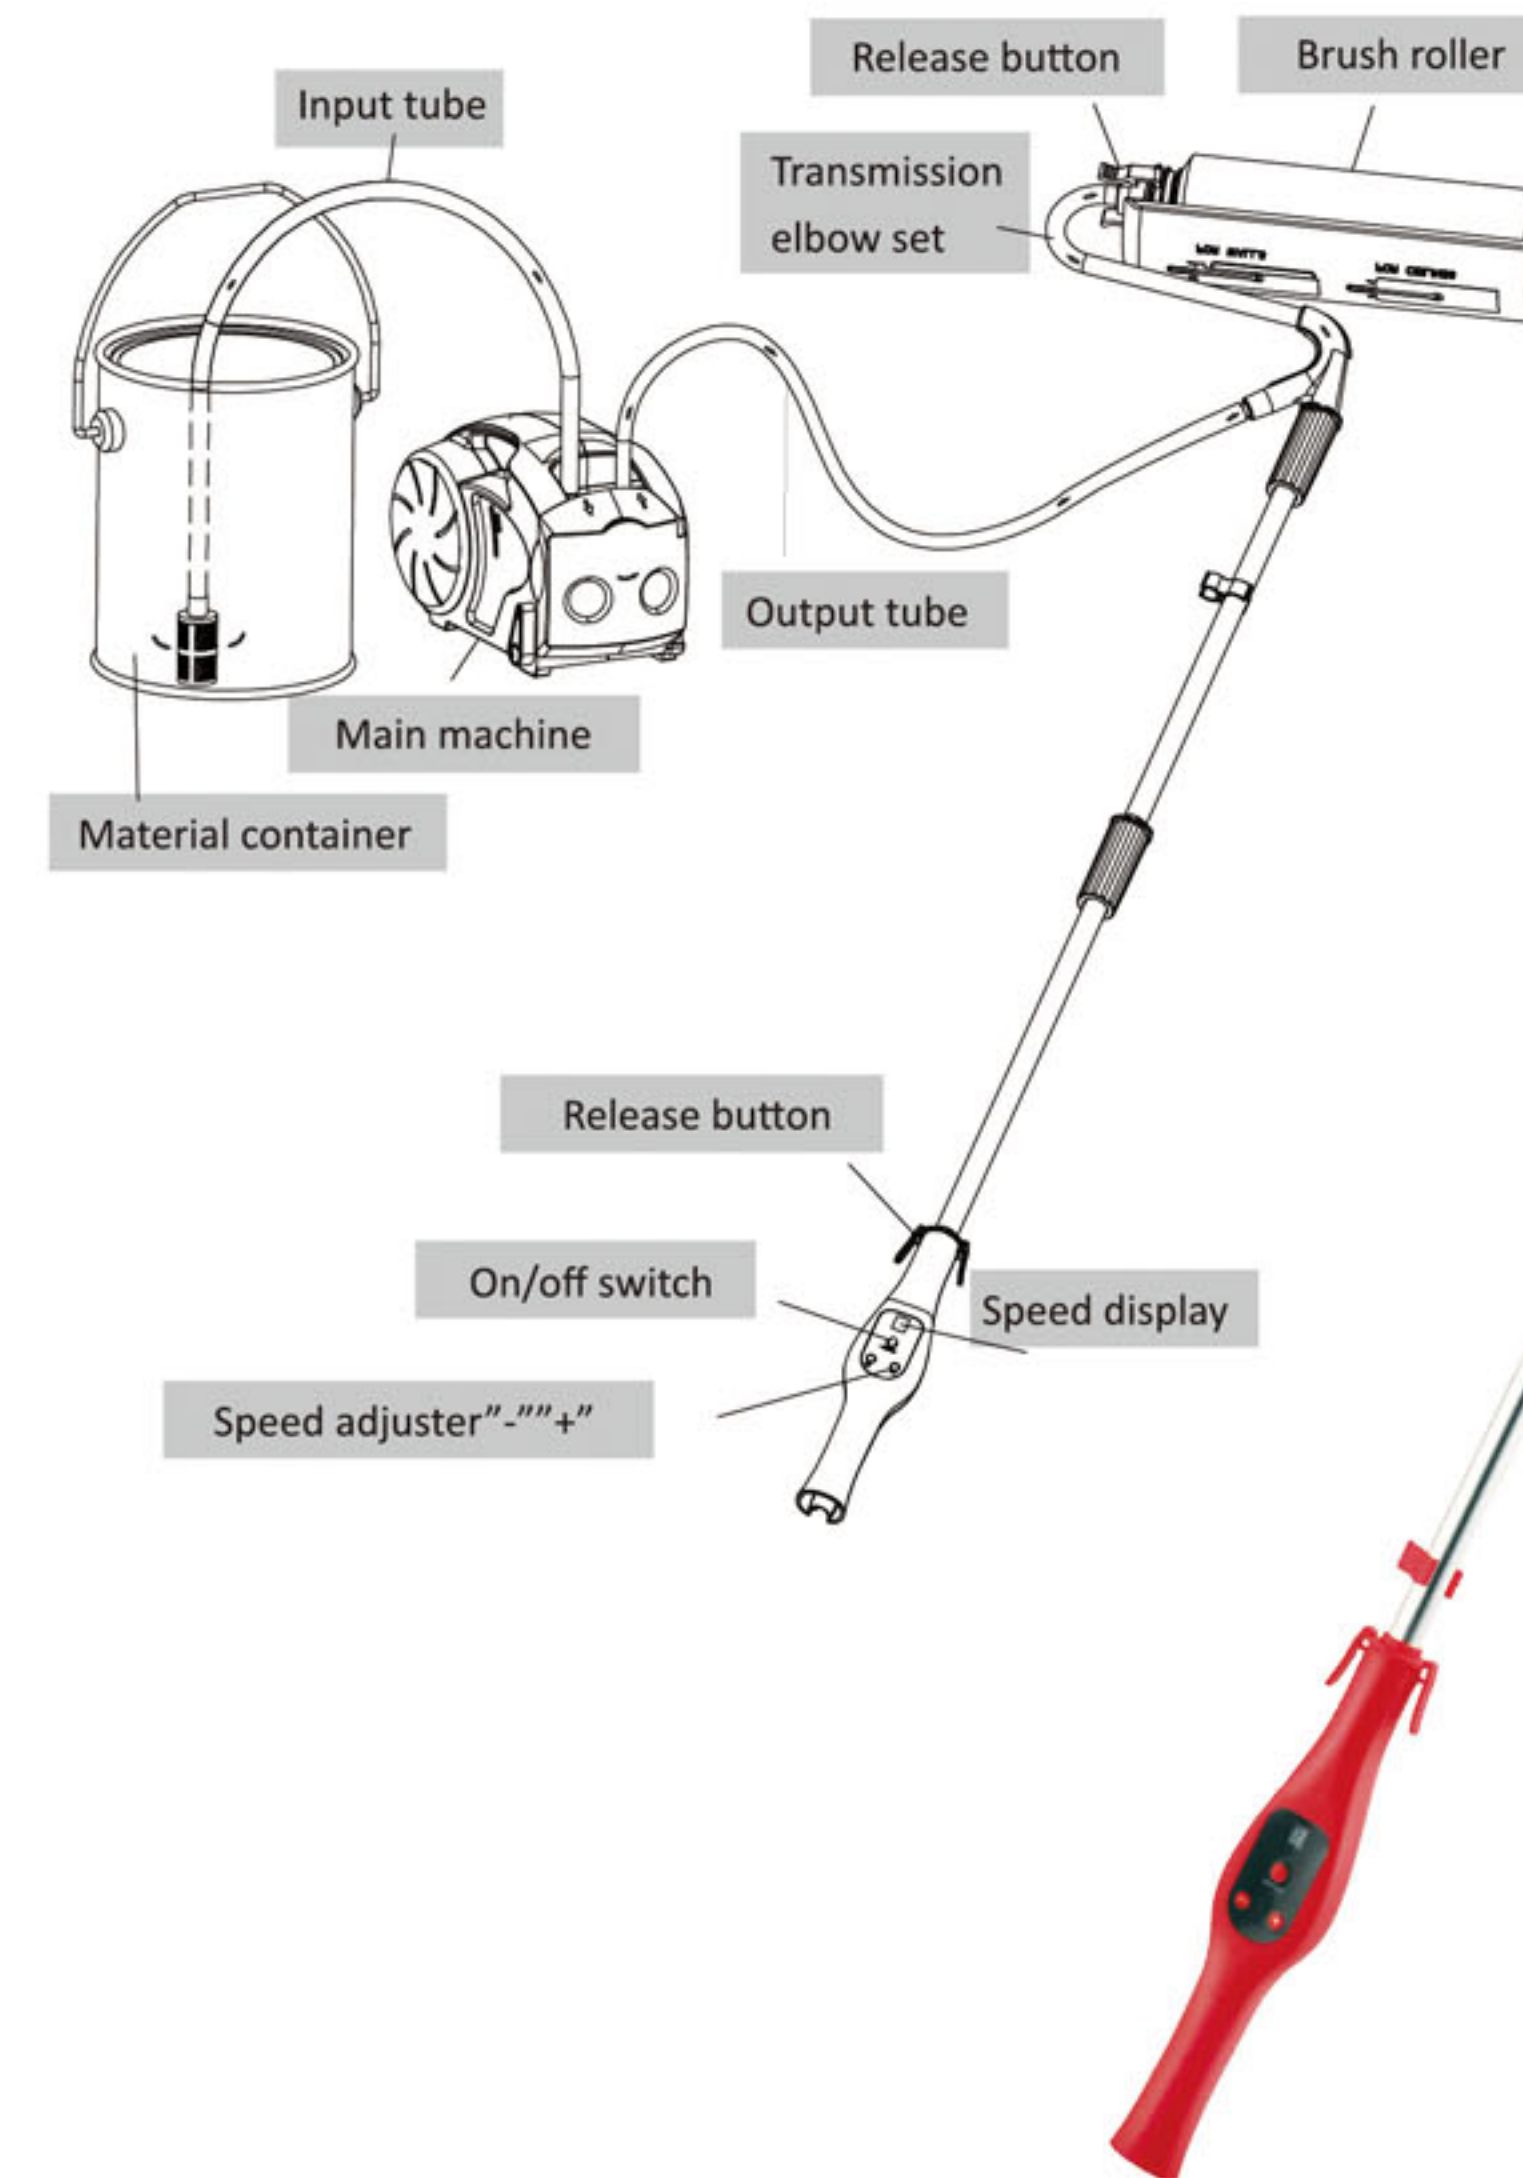

BRUSHLESS

PUMP



GTJ-HD01

CE ENEC GS emc ROHS

Voltage	230V/50Hz	NW	machine/1.6KG,handle/1KG
Power	50W	Machine length	1.3m (with 2 extend handle)
Pumping height	5m	Working hours	over 600h
Max.volume flow	550ML/min	Cable	2m
Speed	180-280/min		

LI- ION BATTERY- BRUSHLESS



POB-HD01-12

Battery Voltage	20V/4.0Ah
Max. Torque	320N.M
Bolt Diameter	M8-M20
Fasten Torque	320N.M
Impact Rate	0-3000times/min




Charger



Li-ion Battery

LI- ION BATTERY- BRUSHLESS

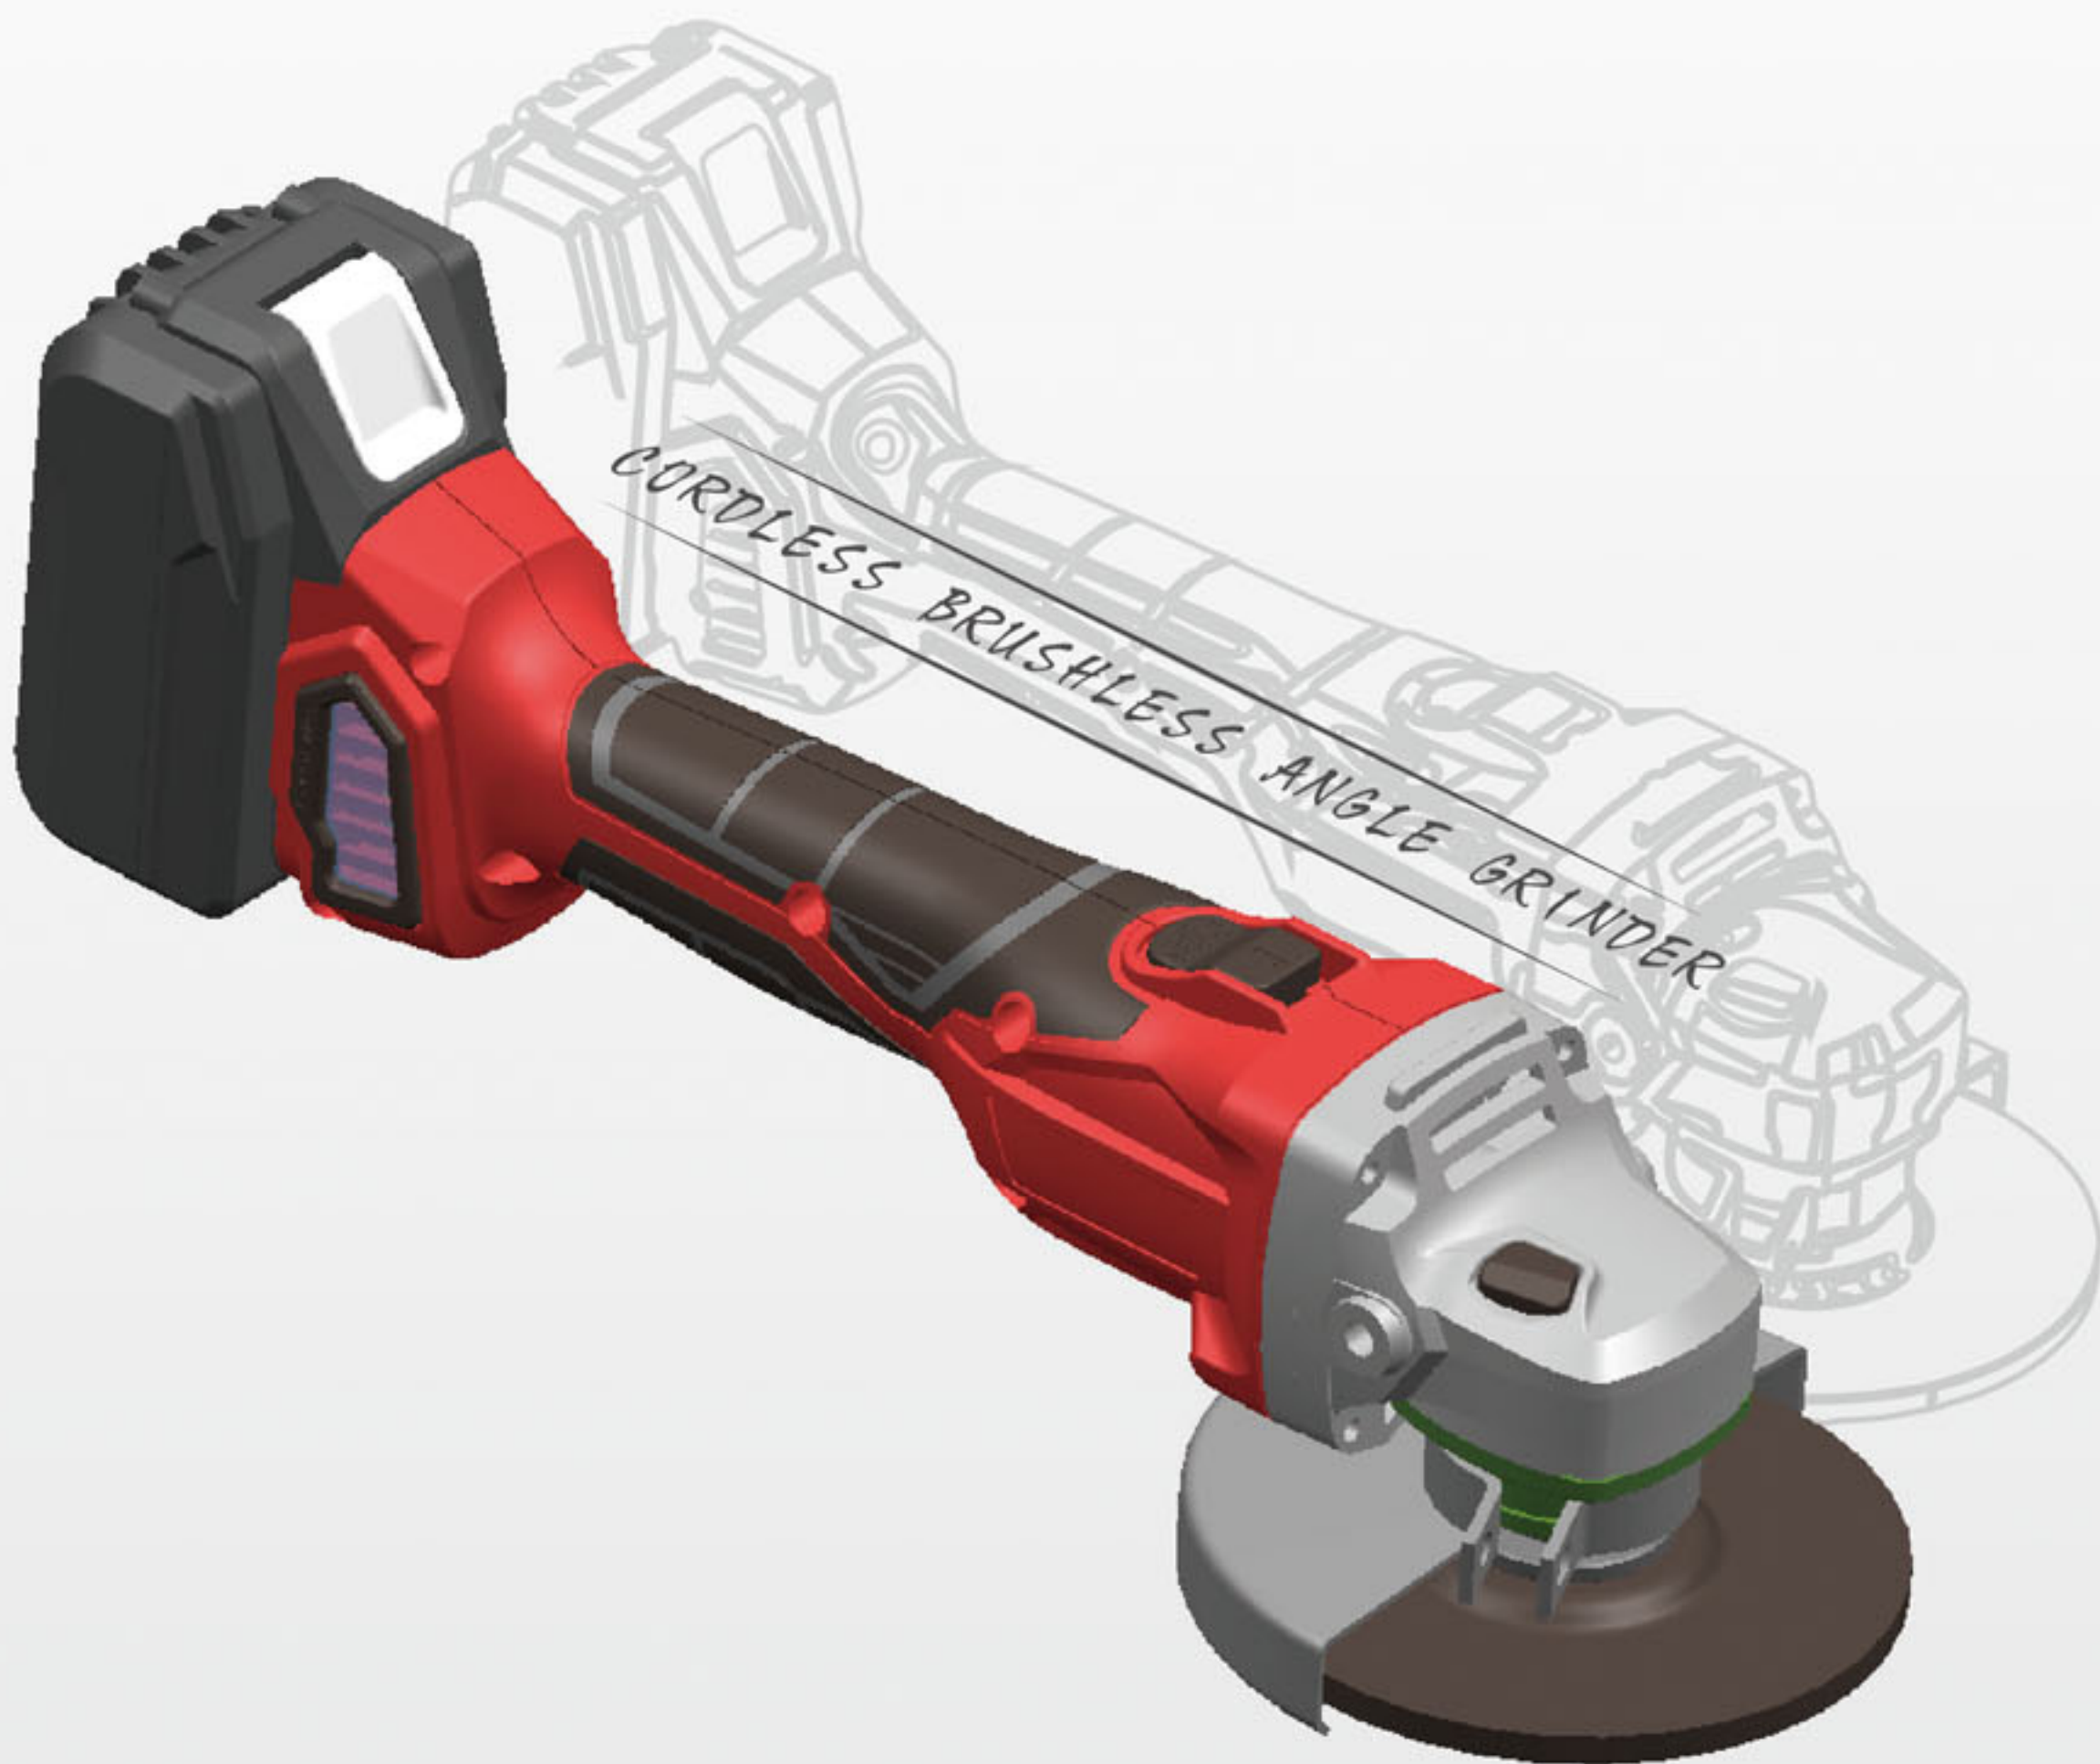

SOM-HD02-115/125

Battery Voltage	2*20V/4.0Ah
Wheel Diameter	100(4"), 115 (4-1/2") , 125 (5")
Speed	8500/min



Charger



Li-ion Battery